

jc777 U.S. PTO  
04/07/00

04-10-00

A

Case Docket No.: 7165

Patent Department  
ZENITH ELECTRONICS CORPORATION  
1000 Milwaukee Avenue  
Glenview, Illinois 60025-2493  
(847) 391-8014

Box PATENT APPLICATION  
Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

**Inventors:** Richard W. Citta  
Scott M. LoPresto  
Jingsong Xia

**For:** MULTIPATH GHOST ELIMINATING EQUALIZER WITH OPTIMUM  
NOISE ENHANCEMENT

Enclosed are specification, claims, Declaration and Power of Attorney and 17  
pages of informal drawings.

jc564 U.S. PTO  
09/545597  
04/07/00

**FEE CALCULATION**

CLAIMS AS FILED					
	FOR	NUMBER FILED	NUMBER EXTRA	RATE	BASIC FEE \$690.00
	TOTAL CLAIMS (20 allowed)	93	73	\$18.00	\$1,314.00
	INDEPENDENT CLAIMS (3 allowed)	3	0	\$78.00	0
				TOTAL FILING FEE	\$2,004.00

Please charge Deposit Account No. 26-0175 in the amount of \$2,004.00. The  
Commissioner is hereby authorized to charge any additional fees which may be  
required, or credit any overpayment to this account. A duplicate copy of this  
sheet is enclosed.

References attached.

*Jack Nail*  
\_\_\_\_\_  
Attorney of Record  
Reg. No.27,566

Express Mail mailing label number: EM588929304US

Date of Deposit: *April 7, 2000*

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee"  
service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Box PATENT  
APPLICATION, Washington, D.C. 20231

Patricia A. Wiederer

(Type or printed Name of Person Mailing paper or fee)

*Patricia A. Wiederer*

(Signature of person mailing paper or fee)

MULTIPATH GHOST ELIMINATING EQUALIZER  
WITH OPTIMUM NOISE ENHANCEMENT

Technical Field of the Invention

5 The present invention is directed to an equalizer that substantially eliminates signal ghosts of up to and including 100% ghosts and, more particularly, to a multipath equalizer with optimum noise enhancement.

Background of the Invention

10 Ghosts are produced at a receiver usually because a signal arrives at the receiver through different transmission paths. For example, in a system having a single transmitter, the multipath transmission of a signal may occur because of signal reflection. That is, the receiver receives a transmitted signal and one or more reflections (i.e., ghosts) of the transmitted signal. As  
15 another example, the multipath transmission of a signal may occur in a system having plural transmitters that transmit the same signal to a receiver using the same carrier frequency. A network which supports this type of  
20 transmission is typically referred to as a single frequency network. Because a ghost results from the multipath

transmission of a signal, a ghost is often referred to as multipath interference.

5 A variety of systems have been devised to deal with the problems caused by ghosts. For example, spread spectrum systems deal very adequately with the problem of a 100% ghost by spreading the transmitted data over a substantial bandwidth. Accordingly, even though a 100% ghost means that some information may be lost, the data can still be recovered because of the high probability that it was spread over frequencies that were not lost because of the ghost. Unfortunately, the data rate associated with spread spectrum systems is typically too low for many applications.

10 It is also known to transmit data as a data vector. A matched filter in a receiver correlates the received data with reference vectors corresponding to the possible data vectors that can be transmitted. A match indicates the transmitted data. Unfortunately, the data rate typically associated with the use of matched filters is still too low for many applications.

20 When high data rates are required, equalizers are often used in a receiver in order to reduce ghosts of a main

signal. An example of a time domain equalizer is a FIR filter. A FIR filter convolves its response with a received signal in order to recover data and eliminate any ghosts of the data. The coefficients applied by the FIR filter asymptotically decrease toward zero for ghosts that are less than 100%. However, for 100% ghosts, the coefficients applied by the FIR filter do not asymptotically decrease toward zero so that a FIR filter becomes infinitely long if a 100% ghost is to be eliminated, making the FIR filter impractical to eliminate a 100% ghost.

A frequency domain equalizer typically includes a Fast Fourier Transform (FFT) which is applied to the received signal. A multiplier multiplies the frequency domain output of the FFT by a compensation vector. An inverse FFT is applied to the multiplication results in order to transform the multiplication results to the time domain. The compensation vector is arranged to cancel the ghost in the received signal leaving only the main signal. However, information in the received main signal is lost at certain frequencies so that the output of the inverse FFT becomes only an approximation of the transmitted data.

U.S. Application 09/158,730 filed September 22, 1998 discloses a vector domain equalizer which effectively eliminates ghosts up to 100% by distributing the transmitted data in both time and frequency so that the vectors are essentially random in the time and frequency domains. Accordingly, in a heavily ghosted channel, all data can be recovered with small noise enhancement, and any enhanced noise that does exist is near white. However, the number of calculations performed by the transform in the receiver to recover the data is large.

U.S. Application Serial No. 09/283,877 filed April 1, 1999 discloses a single path equalizer which effectively eliminates ghosts up to 100% and which uses fewer calculations. This equalizer includes a pre-processor, a finite filter, and a post-processor. The pre-processor multiplies a data input block received from the channel by coefficients **b** in order to modulate the received main signal and its ghost so that the ghost is less than the received main signal. The finite filter applies coefficients **a** in order to eliminate the ghost from the multiplication results. The post-processor applies coefficients **c** to the output of the finite filter in order to reverse the effects

of the modulation imposed by the pre-processor. Also, the post-processor applies a window function to the output of the finite filter. This single path equalizer somewhat enhances noise picked up in the channel.

5                   U.S. Application Serial No. 09/425,522 filed  
October 22, 1999 discloses a dual parallel path equalizer  
having a pre-processor, a finite filter, and a post-  
processor in each path. The pre-processors multiply a data  
input block received from the channel by corresponding  
10                   coefficients  $b_1$  and  $b_2$  in order to modulate the received  
main signal and its ghost so that the ghost is less than the  
received main signal. The finite filters apply  
corresponding coefficients  $a_1$  and  $a_2$  in order to eliminate  
the ghost from the multiplication results. The post-  
15                   processors apply corresponding coefficients  $c_1$  and  $c_2$  to the  
outputs of the finite filters in order to reverse the  
effects of the modulations imposed by the pre-processors.  
Each of the outputs of the post-processors is a solution to  
the problem of a ghost. That is, substantially no ghost is  
20                   present in the output from each of the post-processors. The  
outputs of the post-processors are added in order to  
substantially minimize enhancement of noise, thus producing

better signal to noise performance as compared to a single path equalizer.

The present invention is directed to an equalizer and to a controller for controlling the equalizer so that the equalizer has less hardware than past equalizers and so that the equalizer converges onto an output in which ghosts up to 100% are substantially eliminated.

#### Summary of the Invention

In accordance with one aspect of the present invention, a method is provided to equalize a signal. The signal comprises a series of input blocks of coded data. The method comprises at least the following steps: a) shifting data in each input block of data left by one; b) complex multiplying each of the left shifted input block of data by a first set of equalizer coefficients to provide respective first adjusted output blocks of data, wherein step b) is not a full solution to ghosts; c) complex multiplying each of the input blocks of data by a second set of equalizer coefficients to provide respective second adjusted output blocks of data, wherein step c) is not a full solution to ghosts; d) shifting the data in each input

block of data right by one; e) complex multiplying each of the right shifted input block of data by a third set of equalizer coefficients to provide respective third adjusted output blocks of data, wherein step e) is not a full  
5 solution to ghosts; f) adding corresponding ones of the first, second, and third adjusted output blocks of data; and, g) controlling the first, second, and third sets of equalizer coefficients so that, as a result of the addition performed according to step f), a substantially full  
10 solution to ghosts is obtained.

In accordance with a further aspect of the present invention, an equalizer for processing blocks of data comprises  $n - 1$  data shifters,  $n$  finite filters, an adder, and a controller. Each of the  $n - 1$  data shifters shifts the blocks of data. One of the  $n$  finite filters applies a corresponding set of finite filter coefficients to the blocks of data, and each of the other  $n - 1$  finite filters applies a set of finite filter coefficients to a  
15 corresponding output of the  $n - 1$  data shifters. Ghosts of the blocks of data are not eliminated as a result of the application of the sets of finite filter coefficients corresponding to the  $n$  finite filters, and  $n > 2$ . The adder  
20



is arranged to add outputs from the n finite filters. The controller is arranged to control the sets of finite filter coefficients corresponding to the n finite filters so that the addition performed by the adder substantially eliminates the ghosts.

In accordance with another aspect of the present invention, an equalizer for processing blocks of data comprises first, second, third, and fourth data shifters, first, second, third, fourth, and fifth finite filters, an adder, and a controller. The first data shifter is arranged to shift the data left by two, and the second data shifter is arranged to shift the data left by one. The third data shifter is arranged to shift the data right by one, and the fourth data shifter is arranged to shift the data right by two. The first finite filter applies a first set of finite filter coefficients to each of the blocks of data which have been shifted by the first data shifter. Ghosts of the blocks of data are not eliminated as a result of the application of the first set of finite filter coefficients. The second finite filter applies a second set of finite filter coefficients to each of the blocks of data which have been shifted by the second data shifter. Ghosts of the

blocks of data are not eliminated as a result of the application of the second set of finite filter coefficients. The third finite filter applies a third set of finite filter coefficients to each of the blocks of data. Ghosts of the blocks of data are not eliminated as a result of the application of the third set of finite filter coefficients. The fourth finite filter applies a fourth set of finite filter coefficients to each of the blocks of data which have been shifted by the third data shifter. Ghosts of the blocks of data are not eliminated as a result of the application of the fourth set of finite filter coefficients. The fifth finite filter applies a fifth set of finite filter coefficients to each of the blocks of data which have been shifted by the fourth data shifter. Ghosts of the blocks of data are not eliminated as a result of the application of the fifth set of finite filter coefficients. The adder is arranged to add outputs from the first, second, third, fourth, and fifth finite filters. The controller is arranged to control the first, second, third, fourth, and fifth sets of finite filter coefficients so that the addition performed by the adder substantially eliminates the ghosts.

Brief Description of the Drawings

These and other features and advantages of the present invention will become more apparent from a detailed consideration of the invention when taken in conjunction with the drawings in which:

Figure 1 illustrates a first embodiment of an equalizer synchronization and coefficient control according to the present invention;

Figure 2 illustrates a second embodiment of an equalizer synchronization and coefficient control according to the present invention;

Figure 3 illustrates a first embodiment of an equalizer in the form of a dual path equalizer according to the present invention;

Figure 4 illustrates an exemplary set of responses for corresponding elements of Figure 3;

Figure 5 illustrates a second embodiment of an equalizer in the form a dual path equalizer according to the present invention;

Figure 6 illustrates an exemplary set of responses for corresponding elements of Figure 5;

Figure 7 illustrates a third embodiment of an equalizer in the form a dual path equalizer according to the present invention;

5 Figure 8 illustrates a fourth embodiment of an equalizer in the form a triple path equalizer according to the present invention;

Figure 9 illustrates a fifth embodiment of an equalizer in the form a triple path equalizer according to the present invention;

10 Figure 10 illustrates a flow graph for the triple path equalizer shown in Figure 9;

Figure 11 illustrates an exemplary set of responses for corresponding elements of Figure 9;

15 Figure 12 illustrates a sixth embodiment of an equalizer in the form a generalized multipath equalizer according to the present invention;

Figure 13 illustrates a seventh embodiment of an equalizer in the form a generalized multipath equalizer according to the present invention;

20 Figure 14 shows a first embodiment of a converger arranged to control convergence of the dual path equalizer shown in Figure 3;

Figure 15 shows a second embodiment of a converger arranged to control convergence of the dual path equalizer shown in Figure 5;

Figure 16 shows a fourth embodiment of a converger arranged to control convergence of the triple path equalizer shown in Figure 8;

Figure 17 shows a fifth embodiment of a converger arranged to control convergence of the triple path equalizer shown in Figure 9; and,

Figure 18 shows an exemplary error generator that may be used for the error generators of the convergence controls shown in Figures 14, 15, 16, and 17.

#### Detailed Description

##### SYSTEM DIAGRAMS

As discussed below, the equalizers of the present inventions apply **b**, **a**, and **c** coefficients to received data blocks in order to substantially eliminate ghosts of the data blocks that may be received by a receiver. The **c** coefficients are fixed in both magnitude and width and, thus, require only synchronization with the data blocks. The **b** coefficients are varied in width as the time interval

between data blocks and ghosts vary. Thus, the **b** coefficients require both synchronization and width control. The **a** coefficients are varied in width, magnitude, and phase according to both the time interval between data blocks and ghosts and according to the characteristics of the ghosts. Accordingly, the **a** coefficients require synchronization, and width, magnitude, and phase control.

A first embodiment of a synchronization and coefficient control is shown in Figure 1. As shown in Figure 1, an equalizer 1, such as any of the equalizers described below, receives data and ghosts of the data. The data, for example, may be transmitted in the form of data blocks. The equalizer 1 processes the data blocks and ghosts in order to eliminate ghosts. A synchronizer 2 synchronizes the equalizer 1 to the incoming data blocks using any conventional synchronizing technique. A channel estimator 3 estimates the characteristics of the channel through which the data blocks are transmitted in order to control the **b** coefficients in width and to control the **a** coefficients in width, magnitude, and phase so as to substantially eliminate ghosts.

5 The channel estimator 3, for example, may be any  
of the channel estimators that are conventionally used in  
COFDM systems. Such channel estimators may be used to  
estimate the magnitude of ghosts, and the time interval  
between data blocks and their ghosts. The magnitude and  
time interval can be used as addresses into look up tables  
in order to read out the appropriate sets of **a** coefficients.  
In order to reduce the size of such look up tables to a  
manageable number of entries, interpolation may be used  
between entries when a combination of the time interval **d**  
and ghost magnitude does not correspond exactly to the  
addresses of the look up tables. The channel estimator 3  
also uses the time interval **d** to control the width of the **b**  
coefficients as described below.

10  
15  
20 A second embodiment of a synchronization and  
coefficient control is shown in Figure 2. As shown in  
Figure 2, an equalizer 5, such as any of the equalizers  
described below, receives data and ghosts. The data, for  
example, may be in the form of data blocks. The equalizer 5  
processes the data blocks and ghosts in order to eliminate  
the ghosts. A synchronizer 6 synchronizes the equalizer 5  
to the incoming data blocks using any conventional

synchronizing technique. A converger 7 compares the input and output of the equalizer 5 and adjusts the **a** coefficients based upon the comparison results in a direction to substantially eliminate ghosts. The converger 7 also determines the time interval  $d$  between data blocks and ghosts in order to control the width of the **b** coefficients. The converger 7 is described in more detail below.

#### EQUALIZERS

A first equalizer embodiment, i.e., a dual path equalizer 10, is shown in Figure 3 and includes a pre-processor 12 and a 2xFFT 14 (i.e., a twice-the-data-block-length FFT 14) in a common leg of the dual path equalizer 10. The dual path equalizer 10 also includes a first finite filter 16, a first  $2xFFT^{-1}$  18, and a first post-processor 20 in a first path 22, and a second finite filter 24, a second  $2xFFT^{-1}$  26, and a second post-processor 28 in a second path 30. The outputs of the first and second post-processors 20 and 28 are added by an adder 32.

The pre-processor 12 of the dual path equalizer 10 multiplies the signal received from the channel by coefficients  $\mathbf{b}_0$ . The data may be transmitted in blocks with



0954597.040700  
10  
15  
a guard interval between each adjacent pair of data blocks. The signal processed by the dual path equalizer 10, therefore, includes the data blocks and any ghosts of the data blocks. The coefficients  $b_0$  are arranged as a window function that is substantially coextensive with a received data block and its ghost. Thus, the pre-processor 12 eliminates any energy, primarily noise, that is outside of the data blocks and their ghosts. The signal received from the channel is designated in Figure 3 as Input Data.

The 2xFFT 14 applies a Fast Fourier Transform to the output of the pre-processor 12. The Fast Fourier Transform has sufficient coefficients so that it is longer than a data block and may be up to twice as long as a data block.

The first finite filter 16 applies coefficients  $A_1$  to the output of the 2xFFT 14. The first finite filter 16 may be implemented as a complex multiplier that complex multiplies the coefficients  $A_1$  by the frequency domain output of the 2xFFT 14. (Upper case letters are used to denote the frequency domain, and lower case letters are used to denote the time domain.) The output of the first finite filter 16 includes the data, a modified ghost of the data,

and enhanced noise. Unlike the finite filters of the dual path equalizer disclosed in the aforementioned U.S.

Application Serial No. 09/425,522, the first finite filter 16 does not eliminate the ghost from the frequency domain output of the pre-processor 12.

The first  $2x\text{FFT}^{-1}$  18 applies an Inverse Fast Fourier Transform to the output of the first finite filter 16. The Inverse Fast Fourier Transform has sufficient coefficients so that it is longer than a data block and may be up to twice as long as a data block.

The first post-processor 20 multiplies the time domain output from the first  $2x\text{FFT}^{-1}$  18 by coefficients  $c_1$ . The first post-processor 20 performs a window function to eliminate any energy, primarily noise, outside of the data blocks. This window function has a duration (i.e., width) which is substantially equal to the duration (i.e., width) of a data block. Also, the coefficients  $c_1$  applied by the first post-processor 20 are chosen so as to substantially minimize noise enhancement. Unlike the output of the first post-processor of the dual path equalizer disclosed in the aforementioned U.S. Application Serial No. 09/425,522, the

output of the first post-processor 20 does not, by itself, represent a solution to the problem of a ghost.

5       The second finite filter 24 applies coefficients  $A_2$  to the output of the 2xFFT 14. The output of the second finite filter 24 includes the data of the data block, a modified ghost of the data block, and noise. As in the case of the first finite filter 16, the second finite filter 24 may be implemented as a complex multiplier and does not eliminate the ghost from the frequency domain output of the 2xFFT 14.

10       The second  $2xFFT^{-1}$  26 applies an Inverse Fast Fourier Transform to the output of the second finite filter 24. The Inverse Fast Fourier Transform has sufficient coefficients so that it is longer than a data block and may be up to twice as long as a data block.

15       The second post-processor 28 multiplies the time domain output from the second  $2xFFT^{-1}$  26 by coefficients  $c_2$ . The second post-processor 28 performs a window function to eliminate any energy in the received signal that is outside  
20       of the data blocks. This window function has a duration which is substantially equal to the duration of a data block. Also, the coefficients  $c_2$  applied by the second

post-processor 28 are chosen so as to substantially minimize noise enhancement. As in the case of the first post-processor 20, the output of the second post-processor 28 does not represent a solution to the problem of a ghost.

5           As discussed above, the outputs of the first and second post-processors 20 and 28 are added by the adder 32. As a result, the data blocks emerging from each of the first and second paths 22 and 30 are correlated and add to produce a larger amplitude. The ghosts in the outputs of the first and second post-processors 20 and 28 substantially cancel because of the application of the coefficients  $A_1$ ,  $A_2$ ,  $c_1$ , and  $c_2$ . Noise (such as white noise) is less correlated than the data blocks so that, when the outputs of the first and second post-processors 20 and 28 are added, the noise adds to a less extent than does the data blocks. Thus, noise enhancement is substantially minimized.

10  
15  
20           Thus, although neither of the outputs of the first and second post-processors 20 and 28 is a solution to channel distortion such as ghosts up to 100%, the combined output from the adder 32 is a solution, so that the dual path equalizer 10 adequately deals with ghosts up to and including a 100% ghost. Additionally, the signal to noise

ratio of the dual path equalizer 10 is improved over a single path equalizer.

Exemplary sets of the coefficients  $b_0$ ,  $A_1$ ,  $A_2$ ,  $c_1$ , and  $c_2$  are shown in Figure 4. The first column of Figure 4 shows the real parts of the coefficients  $b_0$ ,  $A_1$ ,  $A_2$ ,  $c_1$ , and  $c_2$ , the second column of Figure 4 shows the imaginary parts of the coefficients  $b_0$ ,  $A_1$ ,  $A_2$ ,  $c_1$ , and  $c_2$ , and the third column of Figure 4 shows the absolute values of the coefficients  $b_0$ ,  $A_1$ ,  $A_2$ ,  $c_1$ , and  $c_2$ .

As can be seen from Figure 4, and as discussed above, the coefficients  $b_0$  applied by the pre-processor 12 have a unity real part and a zero imaginary part that are arranged as a window function having a duration that is substantially coextensive with a received data block and its ghost. The number of coefficients in the set of coefficients  $b_0$  depends upon the size of the data block and the interval  $d$  between the signal and its ghost. As shown in Figure 4, for example, if there are sixteen samples in a data block and the interval  $d$  between the data block and its ghost is 1 sample (i.e.,  $1/16$  of a data block), then there are seventeen coefficients ( $16 + 1$ ) in the set of coefficients  $b_0$ . The width of (i.e., the number of

coefficients in) the set of coefficients  $\mathbf{b}_0$ , therefore, is varied as the interval  $d$  between the data block and its ghost varies.

5           The coefficients  $\mathbf{c}_1$  and  $\mathbf{c}_2$  applied respectively by the first and second post-processors 20 and 28 have oppositely sloped real parts and zero imaginary parts that are arranged as corresponding window functions. The coefficients  $\mathbf{c}_1$  and  $\mathbf{c}_2$  are sloped, linear, and reversed weighting functions that operate to optimize noise in such a way that the signal to noise ratio at the output of the adder 32 is substantially enhanced. The width of the coefficients  $\mathbf{c}_1$  is fixed and is equal to the width of a data block. Thus, if a data block has sixteen samples, then there are sixteen coefficients  $\mathbf{c}_1$ . Similarly, the width of the coefficients  $\mathbf{c}_2$  is fixed and is equal to the width of a data block. Thus, if a data block has sixteen samples, then there are sixteen coefficients  $\mathbf{c}_2$ .

20           The coefficients  $\mathbf{A}_1$  and  $\mathbf{A}_2$  applied respectively by the first and second finite filters 16 and 24 have non-zero real and imaginary parts. As discussed below, the coefficients  $\mathbf{A}_1$  and  $\mathbf{A}_2$  are adjusted during operation of the dual path equalizer 10 so that, when the outputs of the

first and second paths 22 and 30 are added by the adder 32, ghosts are substantially eliminated and noise enhancement is substantially minimized. Each of the coefficients  $A_1$  and  $A_2$  has a width that is up to twice as long as the width of a data block. Thus, if the data block has sixteen samples, for example, there may be up to thirty-two coefficients for each of the coefficients  $A_1$  and  $A_2$ .

The pre-processor 12 eliminates noise that may exist outside of the data block and its ghost. Thus, the pre-processor 12 could be eliminated from the dual path equalizer 10. However, if so, noise in the output of the dual path equalizer 10 will be greater than if the pre-processor 12 were not eliminated.

The dual path equalizer 10 includes only one pre-processor and only one FFT. Accordingly, there is less hardware in the dual path equalizer 10 than in the dual path equalizer disclosed in the aforementioned application 09/425,522.

As a second equalizer embodiment, a dual path equalizer 40 is shown in Figure 5 and includes a pre-processor 42 and a 2xFFT 44 in a common leg. The dual path equalizer 40 also includes a first finite filter 46 and a

first post-processor 48 in a first path 50, and a second  
finite filter 52 and a second post-processor 54 in a second  
path 56. The outputs of the first and second post-  
processors 48 and 54 are added by an adder 58, and the  
5 output of the adder 58 is down sampled by two by a down  
sampler 59. Down sampling is needed to reduce the over  
sampling data produced by the 2xFFT 44 in a manner  
equivalent to that effected by the window functions applied  
by the first and second post-processors 20 and 28 of Figure  
10 3.

The pre-processor 42 of the dual path equalizer 40  
multiplies the signal received from the channel by  
coefficients  $b_0$ . As in the case of the coefficients  $b_0$   
applied by the pre-processor 12, the coefficients  $b_0$  applied  
by the pre-processor 42 are arranged as a window function  
15 that is substantially coextensive with a received data block  
and its ghost.

The 2xFFT 44 applies a Fast Fourier Transform to  
the output of the pre-processor 42. The Fast Fourier  
20 Transform has sufficient coefficients so that it is longer  
than a data block and may be up to twice as long as a data  
block.



The first finite filter 46 applies coefficients  $A_1$  to the output of the 2xFFT 44. The first finite filter 46 may be implemented as a complex multiplier that complex multiplies the coefficients  $A_1$  by the frequency domain output of the 2xFFT 44. As in the case of the first and second finite filters 16 and 24 of Figure 3, the first finite filter 46 does not eliminate ghosts from the frequency domain output of the 2xFFT 44.

The first post-processor 48 convolves the frequency domain output from the first finite filter 46 with coefficients  $C_1$ . As in the case of the first and second post-processors 20 and 28 of Figure 3, the output of the first post-processor 48 does not represent a solution to the problem of a ghost. However, the first post-processor 48 weights the output of the first finite filter 46 in order to substantially optimize noise in the first path 50. Accordingly, when the output of the first post-processor 48 is combined with the output of the second post-processor 54 by the adder 58, ghosts are substantially eliminated in the output of the adder 58, and noise enhancement is substantially minimized.

5 The second finite filter 52 applies coefficients  $A_2$  to the output of the 2xFFT 44. The second finite filter 52 may be implemented as a complex multiplier that complex multiplies the coefficients  $A_2$  by the frequency domain output of the 2xFFT 44. As in the case of the first finite filter 46, the second finite filter 52 does not eliminate ghosts from the frequency domain output of the pre-processor 42.

10 The second post-processor 54 convolves the frequency domain output from the second finite filter 52 with coefficients  $C_2$ . As in the case of the first post-processor 48, the output of the second post-processor 54 does not represent a solution to the problem of a ghost. However, the second post-processor 54 weights the output of the second finite filter 52 in order to substantially optimize the noise picked up from the channel by the received signal. Accordingly, as discussed above, when the output of the first post-processor 48 is combined with the output of the second post-processor 54 by the adder 58, ghosts are substantially eliminated in the output of the adder 58, and noise enhancement is substantially minimized.

As indicated above, the outputs of the first and second post-processors 48 and 54 are added by the adder 58. As a result, the data blocks emerging from each of the first and second paths 50 and 56 are correlated and add to produce a larger amplitude. The ghosts in the outputs of the first and second post-processors 48 and 54 substantially cancel because of the application of the coefficients  $A_1$ ,  $A_2$ ,  $C_1$ , and  $C_2$ . Noise (such as white noise) is less correlated than the data blocks so that, when the outputs of the first and second post-processors 48 and 54 are added, the noise adds to a less extent than does the data blocks. Thus, noise enhancement is substantially minimized.

Accordingly, although neither of the outputs of the first and second post-processors 48 and 54 is a solution to channel distortion such as ghosts up to the 100%, the combined output from the adder 58 is a solution, so that the dual path equalizer 40 adequately deals with ghosts up to and including a 100% ghost. Additionally, the signal to noise ratio of the dual path equalizer 40 is improved over a single path equalizer.

The dual path equalizer 40 does not include the first  $2 \times \text{FFT}^{-1}$  18 and the second  $2 \times \text{FFT}^{-1}$  26 of the dual path

equalizer 10. Accordingly, there is less hardware in the dual path equalizer 40 than in the dual path equalizer 10. Also, because there is a Fast Fourier Transform but no Inverse Fast Fourier Transform upstream of the first and second post-processors 48 and 54, the first and second post-processors 48 and 54 are arranged to operate in the frequency domain. Because the dual path equalizer 40 has an FFT but no inverse FFTs, an inverse FFT should be included in the transmitter that transmits the data blocks to the dual path equalizer 40.

Exemplary sets of the coefficients  $b_0$ ,  $A_1$ ,  $A_2$ ,  $C_1$ , and  $C_2$  are shown in Figure 6 for an interval or delay of  $1/16$  between a data block and its ghost. The first column of Figure 6 shows the real parts of the coefficients  $b_0$ ,  $A_1$ ,  $A_2$ ,  $C_1$ , and  $C_2$ , the second column of Figure 6 shows the imaginary parts of the coefficients  $b_0$ ,  $A_1$ ,  $A_2$ ,  $C_1$ , and  $C_2$ , and the third column of Figure 6 shows the absolute values of the coefficients  $b_0$ ,  $A_1$ ,  $A_2$ ,  $C_1$ , and  $C_2$ . The coefficients  $b_0$  applied by the pre-processor 42 may be the same as the coefficients  $b_0$  applied by the pre-processor 12. As can be seen from Figure 6, and as discussed above, the coefficients  $b_0$  applied by the pre-processor 42 have a unity real part

and a zero imaginary part that are arranged as a window function having a duration that is substantially coextensive with a received data block and its ghost.

5           The coefficients  $A_1$  and  $A_2$  applied respectively by the first and second finite filters 46 and 52 have non-zero real and imaginary parts. As discussed below, the coefficients  $A_1$  and  $A_2$  are adjusted during operation of the dual path equalizer 40 so that, when the outputs of the first and second paths 50 and 56 are added by the adder 58, ghosts are substantially eliminated and noise enhancement is substantially minimized.

10           The coefficients  $C_1$  applied by the first post-processor 48 may be derived by performing a Fast Fourier Transform of the coefficients  $c_1$  applied by the first post-processor 20 of the dual path equalizer 10. A predetermined number of the resulting coefficients may then be used as the coefficients  $C_1$ . For example, as shown in Figure 6, the resulting seven most significant coefficients are used as the coefficients  $C_1$ . However, more of the coefficients  
15           resulting from the Fast Fourier Transform of the coefficients  $c_1$  applied by the first post-processor 20 could  
20

be used in order to more effectively eliminate ghosts and minimize noise enhancement.

Similarly, the coefficients  $C_2$  applied by the second post-processor 56 may be derived by performing a Fast Fourier Transform of the coefficients  $c_2$  applied by the second post-processor 28 of the dual path equalizer 10. A predetermined number of the resulting coefficients may then be used as the coefficients  $C_2$ . For example, as shown in Figure 6, the resulting seven most significant coefficients are used as the coefficients  $C_2$ . However, more of the coefficients resulting from the Fast Fourier Transform of the coefficients  $c_2$  applied by the second post-processor 28 could be used if desired.

As a third equalizer embodiment, a dual path equalizer 60 is shown in Figure 7 and includes a pre-processor 62 and a 2xFFT 64 in a common leg. The dual path equalizer 60 also includes a first finite filter 66 and a first post-processor 68 in a first path 70, and a second finite filter 72 and a second post-processor 74 in a second path 76. The outputs of the first and second post-processors 68 and 74 are added by an adder 78, and the

output of the adder 78 is down sampled by two by a down sampler 79.

As can be seen by comparing Figures 5 and 7, the hardware of the dual path equalizer 60 is quite similar to the hardware of the dual path equalizer 40. However, the coefficients applied by the pre-processor 62, by the first and second finite filters 66 and 72, and by the first and second post-processors 68 and 74 are different.

The coefficients  $b_0$  applied by the pre-processor 62 are curved as can be seen in Figure 7. The coefficients  $b_0$  are curved according to the function  $1/(2 - \cos(t))$ . The coefficients  $b_0$  applied by the pre-processor 62 are curved in order to minimize the complexity of the coefficients  $C_1$  and  $C_2$  applied by the first and second post-processors 48 and 54 of the dual path equalizer 40 shown in Figure 5. This curvature of the coefficients  $b_0$  permits implementation of the first and second post-processors 68 and 74 as simplified two tap convolvers. Each tap of each convolver has a magnitude of one which permits the first and second post-processors 68 and 74 to be implemented as adders rather than as multipliers. As in the case of the prior embodiments, the width of (i.e., the number of coefficients

in) the set of coefficients  $\mathbf{b}_0$  is varied as the interval  $d$  between the data block and its ghost varies. As the width of the set of coefficients  $\mathbf{b}_0$  varies, the curvature of the coefficients  $\mathbf{b}_0$  still follows the function  $1/(2 - \cos(t))$ .

5           The coefficients  $\mathbf{A}_1$  and  $\mathbf{A}_2$  applied respectively by the first and second finite filters 66 and 72 have non-zero real and imaginary parts. As discussed below, the coefficients  $\mathbf{A}_1$  and  $\mathbf{A}_2$  are adjusted during operation of the dual path equalizer 60 so that, when the outputs of the first and second paths 70 and 76 are added by the adder 78, ghosts are substantially eliminated and noise enhancement is substantially minimized.

10           The coefficients  $\mathbf{C}_1$  applied by the first post-processor 68 are such that application of an Inverse Fast Fourier Transform to the coefficients  $\mathbf{C}_1$  results in a set of coefficients in the time domain that have a curvature corresponding to the curvature of the coefficients  $\mathbf{b}_0$ .  
15           Similarly, the coefficients  $\mathbf{C}_2$  applied by the second post-processor 74 are such that application of an Inverse Fast Fourier Transform to the coefficients  $\mathbf{C}_2$  results in a set of  
20           coefficients in the time domain that have a curvature corresponding to the curvature of the coefficients  $\mathbf{b}_0$ .



It may be noted that the right most tap of the coefficients  $C_1$  and the left most tap of the coefficients  $C_2$  coincide. Accordingly, the coefficients  $C_1$  and  $C_2$  may be de-composed into three sets of coefficients and may be applied by three corresponding post-processors as shown in Figure 8. Figure 8 shows a fourth equalizer embodiment in the form of a triple path equalizer 80 which includes a pre-processor 82 and a 2xFFT 84 in a common leg. The triple path equalizer 80 also includes a first finite filter 86 and a first post-processor 88 in a first path 90, a second finite filter 92 and a second post-processor 94 in a second path 96, and a third finite filter 98 and a third post-processor 100 in a third path 102. The outputs of the first, second, and third post-processors 88, 94, and 100 are added by an adder 104. A down sampler 106 down samples by two the output of the adder 104.

The coefficients  $b_0$  applied by the pre-processor 82 are the same as the coefficients  $b_0$  applied by the pre-processor 62 of the dual path equalizer 60. The coefficients  $A_1$  applied by the first finite filter 86, the coefficients  $A_2$  applied by the second finite filter 92, and the coefficients  $A_3$  applied by the third finite filter 98

are adjusted during operation of the triple path equalizer 80 so that, when the outputs of the first, second, and third paths 90, 96, and 102 are added by the adder 104, ghosts are substantially eliminated and noise enhancement is

5 substantially minimized. The coefficient  $C_1$  applied by the first post-processor 88 is the left-hand value of the coefficients  $C_1$  applied by the first post-processor 68, the coefficient  $C_2$  applied by the second post-processor 94 is the common value of the coefficients  $C_1$  and  $C_2$  applied by the first and second post-processors 68 and 74, and the coefficient  $C_3$  applied by the third post-processor 100 is the right-hand value of the coefficients  $C_2$  applied by the second post-processor 74.

10 The single tap of the first post-processor 88 results in a shift of one sample to the left of the data processed in the first path 90, the single tap of the second post-processor 94 results in no sample shift of the data processed in the second path 96, and the single tap of the third post-processor 100 results in a shift of one sample to the right of the data processed in the third path 102.

20 Therefore, as shown by a triple path equalizer 110 of Figure

9, the first, second, and third post-processors 88, 94, and 100 can be replaced by sample shifters.

Accordingly, the triple path equalizer 110 includes a pre-processor 112 and a 2xFFT 114 in a common leg. The triple path equalizer 110 also includes a left one-sample shifter 116, a first by-two down sampler 118, and a first finite filter 120 in a first path 122, a second by-two down sampler 124 and a second finite filter 126 in a second path 128, and a right one-sample shifter 130, a third by-two down sampler 132, and a third finite filter 134 in a third path 136. The outputs of the first, second, and third finite filters 120, 126, and 134 are added by an adder 138.

The coefficients  $\mathbf{b}_0$  applied by the pre-processor 112 are the same as the coefficients  $\mathbf{b}_0$  applied by the pre-processor 82 of the triple path equalizer 80. The coefficients  $\mathbf{A}_1$  applied by the first finite filter 120, the coefficients  $\mathbf{A}_2$  applied by the second finite filter 126, and the coefficients  $\mathbf{A}_3$  applied by the third finite filter 134 are adjusted during operation of the triple path equalizer 110 so that, when the outputs of the first, second, and third paths 122, 128, and 136 are added by the adder 138,

ghosts are substantially eliminated and noise enhancement is substantially minimized.

Figure 10 illustrates a flow graph for the triple path equalizer 110 shown in Figure 9. The variable  $n$  designates the number of the sample emerging from the 2xFFT 114. To produce an output sample  $D_n$  from the adder 138, the first finite filter 120 processes a sample  $H_{2n-1}$ , the second finite filter 126 processes a sample  $H_{2n}$ , and the third finite filter 134 processes a sample  $H_{2n+1}$ . Because of the second by-two down sampler 124, the second finite filter 126 processes only the even samples of the samples supplied by the 2xFFT 114. Because of the left one-sample shifter 116 and the first by-two down sampler 118, the first finite filter 120 processes the sample  $H_{2n-1}$  which is one odd sample behind the sample  $H_{2n}$ . Because of the right one-sample shifter 130 and the third by-two down sampler 132, the third finite filter 134 processes the sample  $H_{2n+1}$  which is one odd sample ahead of the sample  $H_{2n}$ .

Exemplary sets of the coefficients  $b_0$ ,  $A_1$ ,  $A_2$ , and  $A_3$ , are shown in Figure 11 assuming an interval  $d$  between a data block and its ghost of one sample (i.e.,  $1/16$  of a data block containing sixteen samples). The first column of

Figure 6 shows the real parts of the coefficients  $b_0$ ,  $A_1$ ,  $A_2$ , and  $A_3$ , the second column of Figure 11 shows the imaginary parts of the coefficients  $b_0$ ,  $A_1$ ,  $A_2$ , and  $A_3$ , and the third column of Figure 11 shows the absolute values of the coefficients  $b_0$ ,  $A_1$ ,  $A_2$ , and  $A_3$ .

The coefficients  $b_0$  applied by the pre-processor 112 are the same as the coefficients  $b_0$  applied by the pre-processor 62. As in the case of the triple path equalizer 80, the width of (i.e., the number of coefficients in) the set of coefficients  $b_0$  is varied as the interval  $d$  between the data block and its ghost varies. As the width of the set of coefficients  $b_0$  varies, the curvature of the coefficients  $b_0$  still follows the function  $1/(2 - \cos(t))$ .

As can be seen from Figure 11, and as discussed above, the coefficients  $b_0$  applied by the pre-processor 112 have a real part shaped according to the function  $1/(2 - \cos(t))$  and a zero imaginary part and are arranged as a window function having a duration that is substantially coextensive with a received data block and its ghost. The coefficients  $A_1$  applied by the first finite filter 120, the coefficients  $A_2$  applied by the second finite filter 126, and

the coefficients  $A_3$  applied by the third finite filter 134 are adjusted during operation of the triple path equalizer 110 so that, when the outputs of the first, second, and third paths 122, 128, and 136 are added by the adder 138, ghosts are substantially eliminated and noise enhancement is substantially minimized.

The triple path equalizer 110 shown in Figure 9 can be generalized by expanding the number of paths. Accordingly, a multipath equalizer 140 shown in Figure 12 includes a pre-processor 142 and a 2xFFT 144 in a common leg. The multipath equalizer 140 also includes a plurality of paths ...  $146_{n-2}$ ,  $146_{n-1}$ ,  $146_n$ ,  $146_{n+1}$ ,  $146_{n+2}$  ... having corresponding sample shifters ...  $148_{n-2}$ ,  $148_{n-1}$ ,  $148_{n+1}$ ,  $148_{n+2}$  ..., corresponding by-two down samplers ...  $150_{n-2}$ ,  $150_{n-1}$ ,  $150_n$ ,  $150_{n+1}$ ,  $150_{n+2}$  ..., and corresponding finite filters ...  $152_{n-2}$ ,  $152_{n-1}$ ,  $152_n$ ,  $152_{n+1}$ ,  $152_{n+2}$  .... The outputs of the finite filters ...  $152_{n-2}$ ,  $152_{n-1}$ ,  $152_n$ ,  $152_{n+1}$ ,  $152_{n+2}$  ... are added by an adder 154.

The coefficients  $b_0$  applied by the pre-processor 142 are the same as the coefficients  $b_0$  applied by the pre-processor 82 of the triple path equalizer 80. As in the case of the triple path equalizer 80, the width of (i.e.,

the number of coefficients in) the set of coefficients  $b_0$  is varied as the interval  $d$  between the data block and its ghost varies. As noted above, the window function applied by the pre-processor 142 eliminates any energy, primarily noise, that is outside of the data blocks and their ghosts. The pre-processor 142 can be eliminated. However, if the pre-processor 142 is eliminated, the finite filters ...  $152_{n-2}$ ,  $152_{n-1}$ ,  $152_n$ ,  $152_{n+1}$ ,  $152_{n+2}$  ... will process more noise than would otherwise be the case. Thus, without the pre-processor 142, additional noise may be present in the output of the adder 154.

The coefficients ...  $A_{n-2}$ ,  $A_{n-1}$ ,  $A_n$ ,  $A_{n+1}$ ,  $A_{n+2}$  ... applied by the corresponding finite filters ...  $152_{n-2}$ ,  $152_{n-1}$ ,  $152_n$ ,  $152_{n+1}$ ,  $152_{n+2}$  ... are adjusted during operation of the multipath equalizer 140 so that, when the outputs of the paths ...  $146_{n-2}$ ,  $146_{n-1}$ ,  $146_n$ ,  $146_{n+1}$ ,  $146_{n+2}$  ... are added by the adder 154, ghosts are substantially eliminated and noise enhancement is substantially minimized.

Similarly, the dual path equalizer 40 as shown in Figure 5 can be generalized by expanding the number of paths. Accordingly, a multipath equalizer 160 shown in Figure 13 includes a pre-processor 162 and a 2xFFT 164 in a

common leg. The multipath equalizer 160 also includes  
 finite filters ...  $166_{n-2}$ ,  $166_{n-1}$ ,  $166_n$ ,  $166_{n+1}$ ,  $166_{n+2}$  ... and  
 corresponding post-processors ...  $168_{n-2}$ ,  $168_{n-1}$ ,  $168_n$ ,  
 $168_{n+1}$ ,  $168_{n+2}$  ... arranged in corresponding paths ...  $170_{n-2}$ ,  
 $170_{n-1}$ ,  $170_n$ ,  $170_{n+1}$ ,  $170_{n+2}$  .... The outputs of the post-  
 processors ...  $168_{n-2}$ ,  $168_{n-1}$ ,  $168_n$ ,  $168_{n+1}$ ,  $168_{n+2}$  ... are  
 added by an adder 172, and the output of the adder 172 is  
 down sampled by two by a down sampler 174.

The finite filters ...  $166_{n-2}$ ,  $166_{n-1}$ ,  $166_n$ ,  $166_{n+1}$ ,  
 $166_{n+2}$  ... may be implemented as complex multipliers that  
 complex multiply the coefficients ...  $A_{n-2}$ ,  $A_{n-1}$ ,  $A_n$ ,  $A_{n+1}$ ,  
 $A_{n+2}$  ... by the frequency domain output of the 2xFFT 164.  
 The post-processors ...  $168_{n-2}$ ,  $168_{n-1}$ ,  $168_n$ ,  $168_{n+1}$ ,  $168_{n+2}$   
 ... convolve the frequency domain outputs from the finite  
 filters ...  $166_{n-2}$ ,  $166_{n-1}$ ,  $166_n$ ,  $166_{n+1}$ ,  $166_{n+2}$  ... 46 with  
 coefficients ...  $C_{n-2}$ ,  $C_{n-1}$ ,  $C_n$ ,  $C_{n+1}$ ,  $C_{n+2}$  ....

The coefficients ...  $A_{n-2}$ ,  $A_{n-1}$ ,  $A_n$ ,  $A_{n+1}$ ,  $A_{n+2}$  ...  
 applied by the corresponding finite filters ...  $166_{n-2}$ ,  $166_{n-1}$ ,  
 $166_n$ ,  $166_{n+1}$ ,  $166_{n+2}$  ... are adjusted during operation of  
 the multipath equalizer 160 so that, when the outputs of the  
 paths ...  $170_{n-2}$ ,  $170_{n-1}$ ,  $170_n$ ,  $170_{n+1}$ ,  $170_{n+2}$  ... are added by



the adder 172, ghosts are substantially eliminated and noise enhancement is substantially minimized.

The coefficients ...  $C_{n-2}$ ,  $C_{n-1}$ ,  $C_n$ ,  $C_{n+1}$ ,  $C_{n+2}$  ... may include the coefficients  $C_1$  and  $C_2$  applied by the first and second post-processors 48 and 54 of the dual path equalizer 40 and additional coefficients selected to achieve a desired level of performance. Also, the pre-processor 162 can be eliminated. However, if the pre-processor 162 is eliminated, the finite filters ...  $166_{n-2}$ ,  $166_{n-1}$ ,  $166_n$ ,  $166_{n+1}$ ,  $166_{n+2}$  ... will process more noise than would otherwise be the case. Thus, without the pre-processor 162, additional noise may be present in the output of the adder 172.

One of the advantages of the multipath equalizers 140 and 160 is that, by increasing the number of finite filters, any weighting functions characterizing the pre-processors 142 and 162 can be transferred to the finite filters. Accordingly, the pre-processors 142 and 162 can be eliminated. Alternatively, the weighting of the coefficients of the pre-processors 142 and 162 can be eliminated so that these coefficients form pure window functions.

## CONVERGENCE

As discussed above, the **A** coefficients may be adaptively controlled by a converger 7 to ensure that the actual output of the equalizer converges on the correct output, i.e., an output free of ghosts. A first embodiment of the converger 7, i.e., an adaptive coefficient control 180, may be provided for the dual path equalizer 10 and is shown in Figure 14. The adaptive convergence control 180 includes a conjugater 182 which conjugates the data from the output of the 2xFFT 14 to facilitate the use of an LMS algorithm to converge the **A** coefficients of the equalizer 10. The data exiting the 2xFFT 14 is complex data. The conjugater 182 conjugates this data by reversing the sign of the imaginary part of the data.

The output of the conjugater 182 is supplied to first and second correlators 184 and 186. An error generator 188, which is discussed more fully below, generates an error based upon the output data from the dual path equalizer 10. This error must be processed in the same manner as the output of the finite filters 16 and 24 of the dual path equalizer 10. Therefore, the adaptive coefficient

control 180 includes an inverse first post-processor 190 and a 2xFFT 192. Also, the adaptive coefficient control 180 includes an inverse second post-processor 194 and a 2xFFT 196. The inverse first post-processor 190 and the inverse second post-processor 194 produce the inverse of the first and second post-processors 20 and 28. Additionally, the 2xFFT 192 and the 2xFFT 196 produce the inverse of the first and second 2xFFT<sup>-1</sup> 18 and 2xFFT<sup>-1</sup> 26 of the dual path equalizer 10. The outputs of the first and second 2xFFTs 192 and 196 are supplied to the corresponding correlators 184 and 186.

The correlators 184 and 186 multiply (i) the error from the error generator 188 as processed by the respective inverse first and second post-processors 190 and 194 and the respective first and second 2xFFTs 192 and 196 and (ii) the conjugated output of the 2xFFT 14. This multiplication effects a modified LMS algorithm to produce adjustments values for the **A** coefficients to converge the equalizer 10. In other words, the outputs of the correlators 184 and 186 are adjustment values of the coefficients **A**<sub>1</sub> and **A**<sub>2</sub> that, when added to the existing coefficients **A**<sub>1</sub> and **A**<sub>2</sub> applied by

the dual path equalizer 10, would cause the dual path equalizer 10 to eliminate ghosts from the received signal.

However, instead of correcting the coefficients  $A_1$  and  $A_2$  in one operation, the coefficients  $A_1$  and  $A_2$  are adjusted in increments. Therefore, multipliers 198 and 200 multiply the outputs of the correlators 184 and 186 by a quantity  $\alpha$ , which has a value of less than one. The output of the multiplier 198 is added to the existing coefficients  $A_1$  of the first finite filter 16, and the output of the multiplier 200 is added to the existing coefficients  $A_2$  of the second finite filter 28. The value  $\alpha$  is used so that these coefficients  $A_1$  and  $A_2$  are corrected in small increments in order to ensure a smooth convergence.

A second embodiment of the converger 7, i.e., an adaptive coefficient control 210, may be provided for the dual path equalizer 40 and is shown in Figure 15. The adaptive convergence control 210 includes a conjugater 212 which conjugates the data from the 2xFFT 44. The output of the conjugater 212 is supplied to first and second correlators 214 and 216. An error generator 218, which is shown in exemplary form in Figure 18, generates an error based upon the output data of the dual path equalizer 40.

10/20/90 04:59:50  
5 This error must be processed in the same manner as the  
output of the finite filters 46 and 52 of the dual path  
equalizer 40. Therefore, the adaptive coefficient control  
210 includes an up sampler 220 which up samples by two the  
output of the error generator 218 in order to thereby  
reverse the effects of the down sampler 59. The adaptive  
coefficient control 210 also includes an inverse first post-  
processor 222 and an inverse second post-processor 224. The  
inverse first post-processor 222 and the inverse second  
post-processor 224 produce an inverse of the first and  
second post-processors 48 and 54. The outputs of the  
inverse first and second post-processors 222 and 224 are  
supplied to the corresponding correlators 214 and 216.

10/20/90 04:59:50  
20 The correlators 214 and 216 multiply (i) the up  
sampled error from the error generator 218 as processed by  
the respective inverse first and second post-processors 222  
and 224 and (ii) the conjugated reference data. In effect,  
the outputs of the correlators 214 and 216 are adjustment  
values of the coefficients  $A_1$  and  $A_2$  that, when added to the  
existing coefficients  $A_1$  and  $A_2$  applied by the dual path  
equalizer 40, would cause the dual path equalizer 40 to  
eliminate ghosts from the received signal.

Again, instead of correcting the coefficients  $A_1$  and  $A_2$  with only one operation, the coefficients  $A_1$  and  $A_2$  are adjusted in increments. Therefore, multipliers 226 and 228 multiply the corresponding outputs of the correlators 214 and 216 by a quantity  $\alpha$ , which has a value of less than one. The output of the multiplier 226 is added to coefficients  $A_1$ , and the output of the multiplier 228 is added to the coefficients  $A_2$ . The value  $\alpha$  is used so that the coefficients  $A_1$  and  $A_2$  are corrected in small increments in order to ensure a smooth convergence.

A third embodiment (not shown) of the converger 7 may be provided for the dual path equalizer 60. In this case, the adaptive coefficient control according to the third embodiment would have the same general arrangement as the adaptive coefficient control 210 shown in Figure 15. However, the inverse first and second post-processors in this third embodiment would be different from the inverse first and second post-processors 222 and 224 of the adaptive coefficient control 210 because of the difference between the first and second post-processors 48 and 54 of the dual path equalizer 40 and the first and second post-processors 68 and 74 of the dual path equalizer 60.

5 A fourth embodiment of the converger 7, i.e., an adaptive coefficient control 240, may be provided for the triple path equalizer 80 and is shown in Figure 16. The adaptive convergence control 240 includes a conjugater 242 which conjugates the data from the 2xFFT 84. The output of the conjugater 242 is supplied to first, second, and third correlators 244, 246, and 248. An error generator 250 generates an error based upon the output of the triple path equalizer 80. The adaptive convergence control 240 includes an up sampler 252 which up samples by two the output of the error generator 250 in order to thereby reverse the effects of the down sampler 106. The adaptive coefficient control 240 also includes an inverse first post-processor 254, an inverse second post-processor 256, and an inverse third post-processor 258. The inverse first, second, and third post-processors 254, 256, and 258 produce an inverse of the first, second, and third post-processors 88, 94, and 100 of the triple path equalizer 80. The outputs of the inverse first, second, and third post-processors 254, 256, and 258 are supplied to the corresponding correlators 244, 246, and 248.

5 The correlators 244, 246, and 248 multiply (i) the up sampled error from the error generator 250 as processed by the respective inverse first, second, and third post-processors 254, 256, and 258 and (ii) the conjugated output of the 2xFFT 84. In effect, the outputs of the correlators 244, 246, and 248 are adjustment values of the coefficients  $A_1$ ,  $A_2$ , and  $A_3$  that, when added to the existing coefficients  $A_1$ ,  $A_2$ , and  $A_3$  applied by the triple path equalizer 80, would cause the triple path equalizer 80 to substantially eliminate ghosts from the received signal.

10 Multipliers 260, 262, and 264 multiply the outputs of the correlators 244, 246, and 248 by a quantity  $\alpha$ , which has a value of less than one. The output of the multiplier 260 is added to coefficients  $A_1$ , the output of the multiplier 262 is added to the coefficients  $A_2$ , and the output of the multiplier 264 is added to the coefficients  $A_3$ .

15 A fifth embodiment of the converger 7, i.e., an adaptive coefficient control 270, may be provided for the triple path equalizer 110 and is shown in Figure 17. The adaptive convergence control 270 includes a conjugater 272 which conjugates the data from the 2xFFT 114. The output of

20



the conjugater 272 is processed along first, second, and third control paths 274, 276, and 278 which correspond to the first, second, and third paths 122, 128, and 136 of the triple path equalizer 110. The first control path 274 includes a left one-sample shifter 280, a first by-two down sampler 282, and a first correlator 284. The left one-sample shifter 280 and the first by-two down sampler 282 replicate the processing of the left one-sample shifter 116 and the first by-two down sampler 118 in the first path 122 of the triple path equalizer 110. The second control path 276 includes a second by-two down sampler 286 and a second correlator 288. The second by-two down sampler 286 replicates the processing of the second by-two down sampler 124 in the second path 128 of the triple path equalizer 110. The third control path 278 includes a right one-sample shifter 290, a third by-two down sampler 292, and a third correlator 294. The right one-sample shifter 290 and the third by-two down sampler 292 replicate the processing of the right one-sample shifter 130 and the third by-two down sampler 132 in the third path 136 of the triple path equalizer 110. An error generator 296 generates an error based upon the output of the triple path equalizer 110.

5 The error from the error generator 296 is supplied  
to the correlators 284, 288, and 294. The correlators 284,  
288, and 294 multiply the error from the error generator 296  
and the respective outputs of the first, second, and third  
by-two down samplers 282, 286, and 292. In effect, the  
outputs of the correlators 284, 288, and 294 are adjustment  
values of the coefficients  $A_1$ ,  $A_2$ , and  $A_3$  that, when added  
to the existing coefficients  $A_1$ ,  $A_2$ , and  $A_3$  applied by the  
triple equalizer 110, would cause the triple path equalizer  
110 to eliminate ghosts from the received signal.

10 Multipliers 298, 300, and 302 multiply the outputs  
of the correlators 284, 288, and 294 by a quantity  $\alpha$ , which  
has a value of less than one. The output of the multiplier  
298 is added to the existing coefficients  $A_1$ , the output of  
the multiplier 300 is added to the existing coefficients  $A_2$ ,  
15 and the output of the multiplier 302 is added to the  
existing coefficients  $A_3$ .

20 By the same token, the adaptive coefficient  
control 270 can be generalized in order to converge the  
output of the multipath equalizer 140 into a ghost free  
signal, and the adaptive coefficient control 210 can be

generalized in order to converge the output of the multipath equalizer 160 into a ghost free signal.

5 An error generator 400 is shown in Figure 18 and may be used for the error generators 188, 218, 250, and 296. The adaptive coefficient controls of the present invention may be operated in either a training mode or a data directed mode. During the training mode, a training signal is transmitted by a transmitter to the corresponding equalizer. A summer 402 subtracts the training signal (which may be locally stored or generated) from the output of the equalizer (which is the received training signal) and supplies this difference to a switch 404. During the data directed mode, the data output of the equalizer is sliced by a slicer 406 using stored slice levels 408 in order to generate as an output the one stored slice level which is closest to the received data. The stored slice levels 408 are the reference in the data directed mode. A summer 410 subtracts the stored slice level provided by the slicer 406 from the output of the equalizer and supplies this difference to the switch 404. The switch 404 selects either the output of the summer 402 or the output from the summer 410 as the error which is processed by the particular

adaptive coefficient control according to the various descriptions above. The switch 404 may be operated by the synchronizer 6 shown in Figure 2.

5 The switch 404 may select the output of the summer 402 (i.e., the training mode) during system start up when the **A** coefficients do not have values likely to produce meaningful output data. Once the equalizer has been coarsely converged during the training mode, the switch 404 may be switched to select the output of the summer 410 (i.e., the data directed mode) so that data can be used in order to achieve and maintain precise convergence of the equalizer.

10 Certain modifications and alternatives of the present invention have been discussed above. Other modifications and alternatives will occur to those practicing in the art of the present invention. For example, because the present invention operates most satisfactorily in the presence of ghosts and other linear distortions, the term ghost as used herein in connection with the present invention includes ghosts and/or other linear distortions.

15

20

Also, the Fast Fourier Transforms and inverse Fast Fourier Transforms described above can have lengths other than those described above.

Furthermore, the invention has been described above as if a single ghost is received. In the case where multiple ghosts are received, it may be desirable to apply multiple sets of the coefficients to the received signal or a single set tailored for multiple ghosts. Also, the spacing between coefficients is described above as being the interval  $d$ . However, in the case where the interval  $d$  is not evenly divisible into the block length of a data block, or in the case where more than one ghost are received, the spacing between the coefficients may be other than the interval  $d$ .

The guard interval discussed above may have any desired values including zero.

Moreover, as described above, the error generated by the error generator 400 is correlated with the conjugated output of a 2xFFT that is part of the corresponding equalizer, and this correlation is used to adjust the appropriate **A** coefficients. Instead, the error generated by the error generator 400 could be used in a zero forcing

method to directly adjust the appropriate **A** coefficients without correlation with the conjugated output of the corresponding 2xFFT. The zero forcing method, however, may not suitably account for noise in the input.

5

Accordingly, the description of the present invention is to be construed as illustrative only and is for the purpose of teaching those skilled in the art the best mode of carrying out the invention. The details may be varied substantially without departing from the spirit of the invention, and the exclusive use of all modifications which are within the scope of the appended claims is reserved.

0046357.040700  
10

WHAT IS CLAIMED IS:

1           1. A method of equalizing a signal, wherein the  
2 signal comprises a series of input blocks of coded data, the  
3 method comprising at least the following steps:

4           a) shifting data in each input block of data to  
5 the left;

6           b) complex multiplying each of the left shifted  
7 input block of data by a first set of equalizer coefficients  
8 to provide respective first adjusted output blocks of data,  
9 wherein step b) is not a full solution to ghosts;

10          c) complex multiplying each of the input blocks of  
11 data by a second set of equalizer coefficients to provide  
12 respective second adjusted output blocks of data, wherein  
13 step c) is not a full solution to ghosts;

14          d) shifting the data in each input block of data  
15 to the right;

16          e) complex multiplying each of the right shifted  
17 input block of data by a third set of equalizer coefficients  
18 to provide respective third adjusted output blocks of data,  
19 wherein step e) is not a full solution to ghosts;

20 f) adding corresponding ones of the first, second,  
 21 and third adjusted output blocks of data; and,  
 22 g) controlling the first, second, and third sets  
 23 of equalizer coefficients so that, as a result of the  
 24 addition performed according to step f), a substantially  
 25 full solution to ghosts is obtained.

1 2. The method of claim 1 wherein step g)  
 2 comprises the following steps:  
 3 estimating the channel; and,  
 4 controlling the first, second, and third sets of  
 5 equalizer coefficients based upon the estimated channel.

6 3. The method of claim 1 wherein step g)  
 7 comprises the step of controlling the first, second, and  
 8 third sets of equalizer coefficients based upon the addition  
 9 of step f).

1 4. The method of claim 1 wherein step g)  
 2 comprises the following steps:  
 3 g1) performing a comparison based upon the  
 4 addition of step f) and the input blocks of data; and,



5                   g2) controlling the first, second, and third sets  
6 of equalizer coefficients based upon the comparison  
7 performed in step g1).

1                   5. The method of claim 1 wherein step g)  
2 comprises the following steps:

3                   g1) comparing results of the addition of step f)  
4 to a reference to form an error;

5                   g2) conjugating the input blocks of data;

6                   g3) shifting data in the conjugated input blocks  
7 of data to the left;

8                   g4) shifting the data in the conjugated input  
9 blocks of data to the right;

10                   g5) correlating the left shifted, conjugated input  
11 blocks of data and the error;

12                   g6) correlating the conjugated input blocks of  
13 data and the error;

14                   g7) correlating the right shifted, conjugated  
15 input blocks of data and the error;

16                   g8) controlling the first set of equalizer  
17 coefficients based upon the correlation performed at step  
18 g5);

19                   g9) controlling the second set of equalizer  
20 coefficients based upon the correlation performed at step  
21 g6); and,  
22                   g10) controlling the third set of equalizer  
23 coefficients based upon the correlation performed at step  
24 g7).

1                   6. The method of claim 5 wherein step g5)  
2 comprises the step of down sampling the left shifted,  
3 conjugated input blocks of data, wherein step g6) comprises  
4 the step of down sampling the conjugated input blocks of  
5 data, and wherein step g7) comprises the step of down  
6 sampling the right shifted, conjugated input blocks of data.

7                   7. The method of claim 5 wherein the reference is  
8 a training signal.

1                   8. The method of claim 5 wherein the reference is  
2 sliced data.

1                   9. The method of claim 1 wherein step g)  
2 comprises the following steps:  
3                   g1) comparing results of the addition of step f)  
4 to a reference to form an error;  
5                   g2) performing a left shift based upon the input  
6 blocks of data;  
7                   g3) performing a right shift based upon the input  
8 blocks of data;  
9                   g4) performing a first correlation based upon  
10 results from step g2) and the error;  
11                   g5) performing a second correlation based upon the  
12 input blocks of data and the error;  
13                   g6) performing a third correlation based upon  
14 results from step g3) and the error;  
15                   g7) controlling the first set of equalizer  
16 coefficients based upon the first correlation;  
17                   g8) controlling the second set of equalizer  
18 coefficients based upon the second correlation; and,  
19                   g9) controlling the third set of equalizer  
20 coefficients based upon the third correlation.

1                   10. The method of claim 11 wherein the reference  
2 is a training signal.

1                   11. The method of claim 11 wherein the reference  
2 is sliced data.

1                   12. The method of claim 1 wherein step g)  
2 comprises the following steps:

3                   g1) conjugating the input blocks of data;

4                   g2) shifting data in the conjugated input blocks  
5 of data to the left;

6                   g3) shifting the data in the conjugated input  
7 blocks of data to the right;

8                   g4) performing a first correlation based upon the  
9 left shifted, conjugated input blocks of data and the  
10 addition of step f);

11                   g5) performing a second correlation based upon the  
12 conjugated input blocks of data and the addition of step f);

13                   g6) performing a third correlation based upon the  
14 right shifted, conjugated input blocks of data and the  
15 addition of step f);

16                   g7) controlling the first set of equalizer  
17 coefficients based upon the first correlation;  
18                   g8) controlling the second set of equalizer  
19 coefficients based upon the second correlation; and,  
20                   g9) controlling the third set of equalizer  
21 coefficients based upon the third correlation.

1                   13. The method of claim 1 wherein step g)  
2 comprises the following steps:  
3

4                   g1) performing a left shift based upon the input  
5 blocks of data;

6                   g2) performing a right shift based upon the input  
7 blocks of data;

8                   g3) performing a first correlation based upon  
9 results from step g1) and the first, second, and third  
adjusted output blocks of data;

10                   g4) performing a second correlation based upon the  
11 input blocks of data and the first, second, and third  
12 adjusted output blocks of data;

13                   g5) performing a third correlation based upon  
14 results from step g2) and the first, second, and third  
15 adjusted output blocks of data;

16                   g6) controlling the first set of equalizer  
17                   coefficients based upon the first correlation;  
18                   g7) controlling the second set of equalizer  
19                   coefficients based upon the second correlation; and,  
20                   g8) controlling the third set of equalizer  
21                   coefficients based upon the third correlation.

1                   14. The method of claim 1 further comprising the  
2                   step of h) applying pre-processing coefficients to each data  
3                   block prior to steps a), c), and d).  
4

5                   15. The method of claim 14 wherein step g)  
6                   comprises the step of controlling a width of the pre-  
7                   processing coefficients so that the width of the pre-  
8                   processing coefficients is substantially commensurate with a  
9                   width of a data block and an interval between a data block  
10                   and a ghost.  
11

1                   16. The method of claim 14 wherein step g)  
2 comprises the following steps:  
3                   estimating the channel; and,  
4                   controlling the first, second, and third sets of  
5 equalizer coefficients based upon the estimated channel.

1                   17. The method of claim 14 wherein step g)  
2 comprises the step of controlling the first, second, and  
3 third sets of equalizer coefficients based upon the addition  
4 of step f).  
5

1                   18. The method of claim 14 wherein step g)  
2 comprises the following steps:  
3                   g1) performing a comparison based upon the  
4 addition of step f) and the input blocks of data; and,  
5                   g2) controlling the first, second, and third sets  
6 of equalizer coefficients based upon the comparison  
7 performed in step g1).

1           19. The method of claim 14 wherein step g)  
2 comprises the following steps:  
3           g1) comparing results of the addition of step f)  
4 to a reference to form an error;  
5           g2) conjugating the input blocks of data;  
6           g3) performing a correlation based upon the error  
7 and the conjugated input blocks of data; and,  
8           g4) controlling the first, second, and third sets  
9 of equalizer coefficients based upon the correlation.

10           20. The method of claim 19 wherein the reference  
11 is a training signal.

12           21. The method of claim 19 wherein the reference  
13 is sliced data.

14           22. The method of claim 14 wherein step g)  
15 comprises the following steps:  
16           g1) comparing results of the addition of step f)  
17 to a reference to form an error;  
18           g2) conjugating the input blocks of data;



6                   g3) shifting data in the conjugated input blocks  
7 of data to the left;  
8                   g4) shifting the data in the conjugated input  
9 blocks of data to the right;  
10                  g5) correlating the left shifted, conjugated input  
11 blocks of data and the error;  
12                  g6) correlating the conjugated input blocks of  
13 data and the error;  
14                  g7) correlating the right shifted, conjugated  
15 input blocks of data and the error;  
16                  g8) controlling the first set of equalizer  
17 coefficients based upon the correlation performed at step  
18 g5);  
19                  g9) controlling the second set of equalizer  
20 coefficients based upon the correlation performed at step  
21 g6); and,  
22                  g10) controlling the third set of equalizer  
23 coefficients based upon the correlation performed at step  
24 g7).

1                   23. The method of claim 22 wherein step g5)  
2 comprises the step of down sampling the left shifted,  
3 conjugated input blocks of data, wherein step g6) comprises  
4 the step of down sampling the conjugated input blocks of  
5 data, and wherein step g7) comprises the step of down  
6 sampling the right shifted, conjugated input blocks of data.

1                   24. The method of claim 22 wherein the reference  
2 is a training signal.

3                   25. The method of claim 22 wherein the reference  
4 is sliced data.

5                   26. The method of claim 14 wherein step g)  
6 comprises the following steps:

7                   g1) comparing results of the addition of step f)  
8 to reference data to form an error;

                  g2) performing a left shift based upon the input  
blocks of data;

                  g3) performing a right shift based upon the input  
blocks of data;

9                   g4) performing a first correlation based upon  
10 results from step g2) and the error;

11                   g5) performing a second correlation based upon the  
12 input blocks of data and the error;

13                   g6) performing a third correlation based upon  
14 results from step g3) and the error;

15                   g7) controlling the first set of equalizer  
16 coefficients based upon the first correlation;

17                   g8) controlling the second set of equalizer  
18 coefficients based upon the second correlation; and,

19                   g9) controlling the third set of equalizer  
20 coefficients based upon the third correlation.

21                   27. The method of claim 26 wherein the reference  
22 is a training signal.

23                   28. The method of claim 26 wherein the reference  
24 is sliced data.

1                   29. The method of claim 21 wherein step g)  
2 comprises the following steps:  
3                   g1) conjugating the input blocks of data;  
4                   g2) shifting data in the conjugated input blocks  
5 of data to the left;  
6                   g3) shifting the data in the conjugated input  
7 blocks of data to the right;  
8                   g4) performing a first correlation based upon the  
9 left shifted, conjugated input blocks of data and the  
10 addition of step f);  
11                   g5) performing a second correlation based upon the  
12 conjugated input blocks of data and the addition of step f);  
13                   g6) performing a third correlation based upon the  
14 right shifted, conjugated input blocks of data and the  
15 addition of step f);  
16                   g7) controlling the first set of equalizer  
17 coefficients based upon the first correlation;  
18                   g8) controlling the second set of equalizer  
19 coefficients based upon the second correlation; and,  
20                   g9) controlling the third set of equalizer  
21 coefficients based upon the third correlation.

1                   30. The method of claim 14 wherein step g)  
2 comprises the following steps:

3                   g1) performing a left shift based upon the input  
4 blocks of data;

5                   g2) performing a right shift based upon the input  
6 blocks of data;

7                   g3) performing a first correlation based upon  
8 results from step g1) and the first, second, and third  
9 adjusted output blocks of data;

10                  g4) performing a second correlation based upon the  
11 input blocks of data and the first, second, and third  
12 adjusted output blocks of data;

13                  g5) performing a third correlation based upon  
14 results from step g2) and the first, second, and third  
15 adjusted output blocks of data;

16                  g6) controlling the first set of equalizer  
17 coefficients based upon the first correlation;

18                  g7) controlling the second set of equalizer  
19 coefficients based upon the second correlation; and,

20                  g8) controlling the third set of equalizer  
21 coefficients based upon the third correlation.

1           31. The method of claim 14 wherein the pre-  
2           processing coefficients are curved.

1           32. The method of claim 14 wherein the pre-  
2           processing coefficients are curved substantially according  
3           to a function  $1/(2 - \cos(t))$ .

1           33. The method of claim 1 further comprising the  
2           step of applying a spectral transformation to each data  
3           block prior to steps a), c), and d), wherein the spectral  
4           transformation is longer than a data block.

1           34. An equalizer for processing blocks of data  
2           comprising:

3           n - 1 data shifters, wherein each of the n - 1  
4           data shifters shifts the blocks of data;

5           n finite filters, wherein one of the n finite  
6           filters applies a corresponding set of finite filter  
7           coefficients to the blocks of data, wherein each of the  
8           other n - 1 finite filters applies a set of finite filter  
9           coefficients to a corresponding output of the n - 1 data  
10          shifters, wherein ghosts of the blocks of data are not

11 eliminated as a result of the application of the sets of  
12 finite filter coefficients corresponding to the n finite  
13 filters, and wherein  $n > 2$ ;

14 an adder arranged to add outputs from the n finite  
15 filters; and,

16 a controller arranged to control the sets of  
17 finite filter coefficients corresponding to the n finite  
18 filters so that the addition performed by the adder  
19 substantially eliminates the ghosts.

20 35. The equalizer of claim 34 wherein the  
21 controller comprises a channel estimator that estimates the  
22 channel through which the blocks of data are transmitted.

23 36. The equalizer of claim 34 wherein the  
24 controller controls the n sets of finite filter coefficients  
25 based upon an output of the adder.

26 37. The equalizer of claim 34 wherein the  
27 controller comprises a comparator that performs a comparison  
28 based upon an output of the adder and the blocks of data.

1                   38. The equalizer of claim 34 wherein the  
2 controller comprises:

3                   a comparator arranged to compare an output of the  
4 adder to a reference to form an error;

5                   a conjugator arranged to conjugate the blocks of  
6 data;

7                   n - 1 data shifters arranged to shift the  
8 conjugated blocks of data; and,

9                   n correlators arranged to perform n - 1  
10 correlations of the shifted, conjugated blocks of data and  
11 the error and to perform one correlation of the conjugated  
12 blocks of data and the error, wherein each of the n  
13 correlators is arranged to control a corresponding set of  
14 equalizer coefficients.

1                   39. The equalizer of claim 38 wherein the  
2 controller further comprises n down samplers, wherein n - 1  
3 of the n down samplers are arranged to down sample the  
4 shifted, conjugated blocks of data prior upstream of the  
5 correlators, and wherein the other down sampler is arranged  
6 to down sample the conjugated blocks of data upstream of the  
7 correlators.



1                   40. The equalizer of claim 38 wherein the  
2 reference is a training signal.

1                   41. The equalizer of claim 38 wherein the  
2 reference is sliced data.

1                   42. The equalizer of claim 34 wherein the  
2 controller comprises:

3                   a comparator arranged to compare an output of the  
4 adder to a reference to form an error;

5                   n - 1 data shifters arranged to shift the blocks  
6 of data; and,

7                   n correlators arranged to perform n - 1  
8 correlations based upon the shifted blocks of data and the  
9 error and to perform one correlation based upon the blocks  
10 of data and the error, wherein each of the n correlators is  
11 arranged to control a corresponding set of equalizer  
12 coefficients.

1                   43. The equalizer of claim 42 wherein the  
2 reference is a training signal.

1                   44. The equalizer of claim 42 wherein the  
2 reference is sliced data.

1                   45. The equalizer of claim 34 wherein the  
2 controller comprises:

3                   a conjugator arranged to conjugate the blocks of  
4 data;

5                   n - 1 data shifters arranged to shift the  
6 conjugated blocks of data;

7                   n correlators arranged to perform n - 1  
8 correlations based upon the shifted, conjugated blocks of  
9 data and an output of the adder and to perform one  
10 correlation based upon the conjugated blocks of data and the  
11 output of the adder, wherein each of the n correlators is  
12 arranged to control a corresponding set of equalizer  
13 coefficients.

1                   46. The equalizer of claim 34 wherein the  
2 controller comprises:

3                   n - 1 data shifters arranged to shift the blocks  
4 of data; and,

5           n correlators arranged to perform  $n - 1$   
6 correlations based upon the shifted blocks of data and an  
7 output of the adder and to perform one correlation based  
8 upon the blocks of data and the output of the adder, wherein  
9 each of the  $n$  correlators is arranged to control a  
10 corresponding set of equalizer coefficients.

1           47. The equalizer of claim 34 further comprising  
2 a pre-processor that applies pre-processor coefficients to  
3 each data block upstream of the  $n - 1$  data shifters and the  
4  $n$  finite filters.

5           48. The equalizer of claim 47 wherein the  
6 controller controls a width of the pre-processing  
7 coefficients so that the width is substantially coincident  
8 with the width of a data block and an interval between a  
9 data block and a ghost.

1           49. The equalizer of claim 47 wherein the pre-  
2 processing coefficients are curved.

1           50. The equalizer of claim 47 wherein the pre-  
2 processing coefficients are curved substantially according  
3 to a function  $1/(2 - \cos(t))$ .

1           51. The equalizer of claim 47 wherein the  
2 controller comprises a channel estimator that estimates the  
3 channel through which the blocks of data are transmitted.

1           52. The equalizer of claim 47 wherein the  
2 controller controls the n sets of finite filter coefficients  
3 based upon an output of the adder.

1           53. The equalizer of claim 47 wherein the  
2 controller comprises a comparator that performs a comparison  
3 based upon an output of the adder and the blocks of data.

1           54. The equalizer of claim 47 wherein the  
2 controller comprises:  
3           a comparator arranged to compare an output of the  
4 adder to a reference to form an error;  
5           a conjugator arranged to conjugate the blocks of  
6 data;

7           n - 1 data shifters arranged to shift the  
8 conjugated blocks of data; and,  
9           n correlators arranged to perform n - 1  
10 correlations of the shifted, conjugated blocks of data and  
11 the error and to perform one correlation of the conjugated  
12 blocks of data and the error, wherein each of the n  
13 correlators is arranged to control a corresponding set of  
14 equalizer coefficients.

55. The equalizer of claim 54 wherein the  
controller further comprises n down samplers, wherein n - 1  
of the n down samplers are arranged to down sample the  
shifted, conjugated blocks of data prior upstream of the  
correlators, and wherein the other down sampler is arranged  
to down sample the conjugated blocks of data upstream of the  
correlators.

56. The equalizer of claim 54 wherein the  
reference is a training signal.

57. The equalizer of claim 54 wherein the  
reference is sliced data.

1           58. The equalizer of claim 47 wherein the  
2 controller comprises:

3           a comparator arranged to compare an output of the  
4 adder to a reference to form an error;

5           n - 1 data shifters arranged to shift the blocks  
6 of data; and,

7           n correlators arranged to perform n - 1  
8 correlations based upon the shifted blocks of data and the  
9 error and to perform one correlation based upon the blocks  
10 of data and the error, wherein each of the n correlators is  
11 arranged to control a corresponding set of equalizer  
12 coefficients.

13           59. The equalizer of claim 58 wherein the  
14 reference is a training signal.

15           60. The equalizer of claim 58 wherein the  
16 reference is sliced data.

1                   61. The equalizer of claim 47 wherein the  
2 controller comprises:

3                   a conjugator arranged to conjugate the blocks of  
4 data;

5                   n - 1 data shifters arranged to shift the  
6 conjugated blocks of data;

7                   n correlators arranged to perform n - 1  
8 correlations based upon the shifted, conjugated blocks of  
9 data and an output of the adder and to perform one  
10 correlation based upon the conjugated blocks of data and the  
11 output of the adder, wherein each of the n correlators is  
12 arranged to control a corresponding set of equalizer  
13 coefficients.

14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
21

9 each of the n correlators is arranged to control a  
10 corresponding set of equalizer coefficients.

1 63. The equalizer of claim 34 wherein  $n > 4$ .

2 64. The equalizer of claim 34 further comprising  
3 a spectral transformation applied to each data block  
4 upstream of the  $n - 1$  data shifters and the n finite  
5 filters, wherein the spectral transformation is longer than  
6 a block of data.

7 65. An equalizer for processing blocks of data  
8 comprising:

9 a first data shifter, wherein the first data  
10 shifter is arranged to shift the data left by two;

a second data shifter, wherein the second data  
shifter is arranged to shift the data left by one;

a third data shifter, wherein the third data  
shifter is arranged to shift the data right by one;

a fourth data shifter, wherein the fourth data  
shifter is arranged to shift the data right by two;



11           a first finite filter, wherein the first finite  
12 filter applies a first set of finite filter coefficients to  
13 each of the blocks of data which have been shifted by the  
14 first data shifter, wherein ghosts of the blocks of data are  
15 not eliminated as a result of the application of the first  
16 set of finite filter coefficients;

17           a second finite filter, wherein the second finite  
18 filter applies a second set of finite filter coefficients to  
19 each of the blocks of data which have been shifted by the  
20 second data shifter, wherein ghosts of the blocks of data  
21 are not eliminated as a result of the application of the  
22 second set of finite filter coefficients;

23           a third finite filter, wherein the third finite  
24 filter applies a third set of finite filter coefficients to  
25 each of the blocks of data, wherein ghosts of the blocks of  
26 data are not eliminated as a result of the application of  
27 the third set of finite filter coefficients;

28           a fourth finite filter, wherein the fourth finite  
29 filter applies a fourth set of finite filter coefficients to  
30 each of the blocks of data which have been shifted by the  
31 third data shifter, wherein ghosts of the blocks of data are

32 not eliminated as a result of the application of the fourth  
33 set of finite filter coefficients;

34 a fifth finite filter, wherein the fifth finite  
35 filter applies a fifth set of finite filter coefficients to  
36 each of the blocks of data which have been shifted by the  
37 fourth data shifter, wherein ghosts of the blocks of data  
38 are not eliminated as a result of the application of the  
39 fifth set of finite filter coefficients;

40 an adder arranged to add outputs from the first,  
41 second, third, fourth, and fifth finite filters; and,

42 a controller arranged to control the first,  
43 second, third, fourth, and fifth sets of finite filter  
44 coefficients so that the addition performed by the adder  
45 substantially eliminates the ghosts.

1 66. The equalizer of claim 65 wherein the  
2 controller comprises a channel estimator that estimates the  
3 channel through which the blocks of data are transmitted.

1           67. The equalizer of claim 65 wherein the  
2 controller controls the first, second, third, fourth, and  
3 fifth sets of finite filter coefficients based upon an  
4 output of the adder.

1           68. The equalizer of claim 65 wherein the  
2 controller comprises a comparator that performs a comparison  
3 based upon an output of the adder and the blocks of data.

1           69. The equalizer of claim 65 wherein the  
2 controller comprises:  
3

4           a comparator arranged to compare an output of the  
5 adder to a reference to form an error;  
6

7           a conjugator arranged to conjugate the blocks of  
8 data;  
9

10          a first data shifter arranged to shift the  
11 conjugated blocks of data left by two;  
12

1           a second data shifter arranged to shift the  
2 conjugated blocks of data left by one;  
3

4           a third data shifter arranged to shift the  
5 conjugated blocks of data right by one;  
6

13           a fourth data shifter arranged to shift the  
14 conjugated blocks of data right by two;

15           a first correlator arranged to perform a  
16 correlation of the error and the conjugated blocks of data  
17 shifted by the first data shifter, wherein the first  
18 correlator is arranged to control the first set of finite  
19 filter coefficients;

20           a second correlator arranged to perform a  
21 correlation of the error and the conjugated blocks of data  
22 shifted by the second data shifter, wherein the second  
23 correlator is arranged to control the second set of finite  
24 filter coefficients;

25           a third correlator arranged to perform a  
26 correlation of the error and the conjugated blocks of data,  
27 wherein the third correlator is arranged to control the  
28 third set of finite filter coefficients;

29           a fourth correlator arranged to perform a  
30 correlation of the error and the conjugated blocks of data  
31 shifted by the third data shifter, wherein the fourth  
32 correlator is arranged to control the fourth set of finite  
33 filter coefficients; and,

a fifth correlator arranged to perform a correlation of the error and the conjugated blocks of data shifted by the fourth data shifter, wherein the fifth correlator is arranged to control the fifth set of finite filter coefficients.

70. The equalizer of claim 69 wherein the controller further comprises a down sampler upstream of each of the first, second, third, fourth, and fifth correlators, wherein the down samplers are arranged to down sample the conjugated blocks of data.

71. The equalizer of claim 69 wherein the reference is a training signal.

72. The equalizer of claim 69 wherein the reference is sliced data.

73. The equalizer of claim 65 wherein the controller comprises:

a comparator arranged to compare an output of the adder to a reference to form an error;

5           a first data shifter arranged to perform a shift  
6 left by two based upon the blocks of data;

7           a second data shifter arranged to perform a shift  
8 left by one based upon the blocks of data;

9           a third data shifter arranged to perform a shift  
10 right by one based upon the blocks of data;

11           a fourth data shifter arranged to perform a shift  
12 right by two based upon the blocks of data;

13           a first correlator arranged to perform a  
14 correlation of an output of the first data shifter and the  
15 error, wherein the first correlator is arranged to control  
16 the first set of finite filter coefficients;

17           a second correlator arranged to perform a  
18 correlation of an output of the second data shifter and the  
19 error, wherein the second correlator is arranged to control  
20 the second set of finite filter coefficients;

21           a third correlator arranged to perform a  
22 correlation based upon the blocks of data and the error,  
23 wherein the third correlator is arranged to control the  
24 third set of finite filter coefficients;

25           a fourth correlator arranged to perform a  
26 correlation of an output of the third data shifter and the

27 error, wherein the fourth correlator is arranged to control  
28 the fourth set of finite filter coefficients; and,  
29 a fifth correlator arranged to perform a  
30 correlation of an output of the fourth data shifter and the  
31 error, wherein the fifth correlator is arranged to control  
32 the fifth set of finite filter coefficients.

1 74. The equalizer of claim 73 wherein the  
2 reference is a training signal.

3 75. The equalizer of claim 73 wherein the  
4 reference is sliced data.

5 76. The equalizer of claim 65 wherein the  
6 controller comprises:

7 a conjugator arranged to conjugate the blocks of  
8 data;

a first data shifter arranged to shift the  
conjugated blocks of data left by two;

a second data shifter arranged to shift the  
conjugated blocks of data left by one;

9                   a third data shifter arranged to shift the  
10 conjugated blocks of data right by one;

11                   a fourth data shifter arranged to shift the  
12 conjugated blocks of data right by two;

13                   a first correlator arranged to perform a  
14 correlation based upon an output of the adder and the  
15 conjugated blocks of data shifted by the first data shifter,  
16 wherein the first correlator is arranged to control the  
17 first set of finite filter coefficients;

18                   a second correlator arranged to perform a  
19 correlation based upon the output of the adder and the  
20 conjugated blocks of data shifted by the second data  
21 shifter, wherein the second correlator is arranged to  
22 control the second set of finite filter coefficients;

23                   a third correlator arranged to perform a  
24 correlation based upon the output of the adder and the  
25 conjugated blocks of data, wherein the third correlator is  
26 arranged to control the third set of finite filter  
27 coefficients;

28                   a fourth correlator arranged to perform a  
29 correlation based upon the output of the adder and the  
30 conjugated blocks of data shifted by the third data shifter,



31 wherein the fourth correlator is arranged to control the  
32 fourth set of finite filter coefficients; and,

33 a fifth correlator arranged to perform a  
34 correlation based upon the output of the adder and the  
35 conjugated blocks of data shifted by the fourth data  
36 shifter, wherein the fifth correlator is arranged to control  
37 the fifth set of finite filter coefficients.

77. The equalizer of claim 65 wherein the  
controller comprises:

a first data shifter arranged to perform a shift  
left by two operation based upon the blocks of data;

a second data shifter arranged to perform a shift  
left by one operation based upon the blocks of data;

a third data shifter arranged to perform a shift  
right by one operation based upon the blocks of data;

a fourth data shifter arranged to perform a shift  
right by two operation based upon the blocks of data;

a first correlator arranged to perform a  
correlation based upon an output of the adder and an output  
of the first data shifter, wherein the first correlator is

14 arranged to control the first set of finite filter  
15 coefficients;

16 a second correlator arranged to perform a  
17 correlation based upon the output of the adder and an output  
18 of the second data shifter, wherein the second correlator is  
19 arranged to control the second set of finite filter  
20 coefficients;

21 a third correlator arranged to perform a  
22 correlation based upon the output of the adder and the  
23 blocks of data, wherein the third correlator is arranged to  
24 control the third set of finite filter coefficients;

25 a fourth correlator arranged to perform a  
26 correlation based upon the output of the adder and an output  
27 of the third data shifter, wherein the fourth correlator is  
28 arranged to control the fourth set of finite filter  
29 coefficients; and,

30 a fifth correlator arranged to perform a  
31 correlation based upon the output of the adder and an output  
32 of the fourth data shifter, wherein the fifth correlator is  
33 arranged to control the fifth set of finite filter  
34 coefficients.

1           78. The equalizer of claim 65 further comprising  
2 a pre-processor that applies pre-processor coefficients to  
3 each block of data upstream of the first, second, third, and  
4 fourth data shifters and upstream of the third finite  
5 filter, wherein the controller controls a width of the pre-  
6 processing coefficients so that the width is substantially  
7 coincident with the width of a block of data and an interval  
8 between a block of data and a ghost.

9           79. The equalizer of claim 78 wherein the  
10 controller comprises a channel estimator that estimates the  
11 channel through which the blocks of data are transmitted.

12           80. The equalizer of claim 78 wherein the  
13 controller controls the first, second, third, fourth, and  
14 fifth sets of finite filter coefficients based upon an  
15 output of the adder.

1           81. The equalizer of claim 78 wherein the  
2 controller comprises a comparator that performs a comparison  
3 based upon an output of the adder and the blocks of data.

1           82. The equalizer of claim 78 wherein the  
2 controller comprises:

3           a comparator arranged to compare an output of the  
4 adder to a reference to form an error;

5           a conjugator arranged to conjugate the blocks of  
6 data;

7           a first data shifter arranged to shift the  
8 conjugated blocks of data left by two;

9           a second data shifter arranged to shift the  
10 conjugated blocks of data left by one;

11           a third data shifter arranged to shift the  
12 conjugated blocks of data right by one;

13           a fourth data shifter arranged to shift the  
14 conjugated blocks of data right by two;

15           a first correlator arranged to perform a  
16 correlation of the error and the conjugated blocks of data  
17 shifted by the first data shifter, wherein the first  
18 correlator is arranged to control the first set of finite  
19 filter coefficients;

20           a second correlator arranged to perform a  
21 correlation of the error and the conjugated blocks of data  
22 shifted by the second data shifter, wherein the second

23 correlator is arranged to control the second set of finite  
24 filter coefficients;

25 a third correlator arranged to perform a  
26 correlation of the error and the conjugated blocks of data,  
27 wherein the third correlator is arranged to control the  
28 third set of finite filter coefficients;

29 a fourth correlator arranged to perform a  
30 correlation of the error and the conjugated blocks of data  
31 shifted by the third data shifter, wherein the fourth  
32 correlator is arranged to control the fourth set of finite  
33 filter coefficients; and,

34 a fifth correlator arranged to perform a  
35 correlation of the error and the conjugated blocks of data  
36 shifted by the fourth data shifter, wherein the fifth  
37 correlator is arranged to control the fifth set of finite  
38 filter coefficients.

1 83. The equalizer of claim 82 wherein the  
2 controller further comprises a down sampler upstream of each  
3 of the first, second, third, fourth, and fifth correlators,  
4 wherein the down samplers are arranged to down sample the  
5 conjugated blocks of data prior.

1           84. The equalizer of claim 82 wherein the  
2 reference is a training signal.

1           85. The equalizer of claim 82 wherein the  
2 reference is sliced data.

1           86. The equalizer of claim 78 wherein the  
2 controller comprises:

3           a comparator arranged to compare an output of the  
4 adder to a reference to form an error;

5           a first data shifter arranged to perform a shift  
6 left by two based upon the blocks of data;

7           a second data shifter arranged to perform a shift  
8 left by one based upon the blocks of data;

9           a third data shifter arranged to perform a shift  
10 right by one based upon the blocks of data;

11           a fourth data shifter arranged to perform a shift  
12 right by two based upon the blocks of data;

13           a first correlator arranged to perform a  
14 correlation of the error and an output of the first data

15 shifter, wherein the first correlator is arranged to control  
16 the first set of finite filter coefficients;

17 a second correlator arranged to perform a  
18 correlation of the error and an output of the second data  
19 shifter, wherein the second correlator is arranged to  
20 control the second set of finite filter coefficients;

21 a third correlator arranged to perform a  
22 correlation based upon the error and the blocks of data,  
23 wherein the third correlator is arranged to control the  
24 third set of finite filter coefficients;

25 a fourth correlator arranged to perform a  
26 correlation of the error and an output of the third data  
27 shifter, wherein the fourth correlator is arranged to  
28 control the fourth set of finite filter coefficients; and,

29 a fifth correlator arranged to perform a  
30 correlation of the error and an output of the fourth data  
31 shifter, wherein the fifth correlator is arranged to control  
32 the fifth set of finite filter coefficients.

1 87. The equalizer of claim 86 wherein the  
2 reference is a training signal.

1                   88. The equalizer of claim 86 wherein the  
2 reference is sliced data.

1                   89. The equalizer of claim 78 wherein the  
2 controller comprises:

3                   a conjugator arranged to conjugate the blocks of  
4 data;

5                   a first data shifter arranged to shift the  
6 conjugated blocks of data left by two;

7                   a second data shifter arranged to shift the  
8 conjugated blocks of data left by one;

9                   a third data shifter arranged to shift the  
10 conjugated blocks of data right by one;

11                   a fourth data shifter arranged to shift the  
12 conjugated blocks of data right by two;

13                   a first correlator arranged to perform a  
14 correlation based upon an output of the adder and the  
15 conjugated blocks of data shifted by the first data shifter,  
16 wherein the first correlator is arranged to control the  
17 first set of finite filter coefficients;

18                   a second correlator arranged to perform a  
19 correlation based upon the output of the adder and the



20 conjugated blocks of data shifted by the second data  
21 shifter, wherein the second correlator is arranged to  
22 control the second set of finite filter coefficients;

23 a third correlator arranged to perform a  
24 correlation based upon the output of the adder and the  
25 conjugated blocks of data, wherein the third correlator is  
26 arranged to control the third set of finite filter  
27 coefficients;

28 a fourth correlator arranged to perform a  
29 correlation based upon the output of the adder and the  
30 conjugated blocks of data shifted by the third data shifter,  
31 wherein the fourth correlator is arranged to control the  
32 fourth set of finite filter coefficients; and,

33 a fifth correlator arranged to perform a  
34 correlation based upon the output of the adder and the  
35 conjugated blocks of data shifted by the fourth data  
36 shifter, wherein the fifth correlator is arranged to control  
37 the fifth set of finite filter coefficients.

1                   90. The equalizer of claim 78 wherein the  
2 controller comprises:

3                   a first data shifter arranged to perform a shift  
4 left by two operation based upon the blocks of data;

5                   a second data shifter arranged to perform a shift  
6 left by one operation based upon the blocks of data;

7                   a third data shifter arranged to perform a shift  
8 right by one operation based upon the blocks of data;

9                   a fourth data shifter arranged to perform a shift  
10 right by two operation based upon the blocks of data;

11                   a first correlator arranged to perform a  
12 correlation based upon an output of the adder and an output  
13 of the first data shifter, wherein the first correlator is  
14 arranged to control the first set of finite filter  
15 coefficients;

16                   a second correlator arranged to perform a  
17 correlation based upon the output of the adder and an output  
18 of the second data shifter, wherein the second correlator is  
19 arranged to control the second set of finite filter  
20 coefficients;

21                   a third correlator arranged to perform a  
22 correlation based upon the output of the adder and the

23 blocks of data, wherein the third correlator is arranged to  
24 control the third set of finite filter coefficients;

25 a fourth correlator arranged to perform a  
26 correlation based upon the output of the adder and an output  
27 of the third data shifter, wherein the fourth correlator is  
28 arranged to control the fourth set of finite filter  
29 coefficients; and,

30 a fifth correlator arranged to perform a  
31 correlation based upon the output of the adder and an output  
32 of the fourth data shifter, wherein the fifth correlator is  
33 arranged to control the fifth set of finite filter  
34 coefficients.

91. The equalizer of claim 78 wherein the pre-  
processing coefficients are curved.

92. The equalizer of claim 78 wherein the pre-  
processing coefficients are curved substantially according  
to a function  $1/(2 - \cos(t))$ .

4                   93. The equalizer of claim 65 further comprising  
5 a spectral transformation applied to each data block  
6 upstream of the first, second, third, and fourth data  
7 shifters and the first, second, third, fourth, and fifth  
8 finite filter, wherein the spectral transformation is longer  
9 than a block of data.

ABSTRACT OF THE DISCLOSURE

5 An equalizer for processing blocks of data includes  $n - 1$  data shifters,  $n$  finite filters, an adder, and a controller. Each of the  $n - 1$  data shifters shifts the blocks of data. One of the  $n$  finite filters applies a corresponding set of finite filter coefficients to the blocks of data, and each of the other  $n - 1$  finite filters applies a set of finite filter coefficients to a corresponding output of the  $n - 1$  data shifters. Ghosts of the blocks of data are not eliminated as a result of the application of the  $n$  sets of finite filter coefficients corresponding to the  $n$  finite filters, and  $n > 2$ . The adder is arranged to add outputs from the  $n$  finite filters. The controller is arranged to control the sets of finite filter coefficients corresponding to the  $n$  finite filters so that the addition performed by the adder substantially eliminates the ghosts.

7163  
7164  
7147  
7165

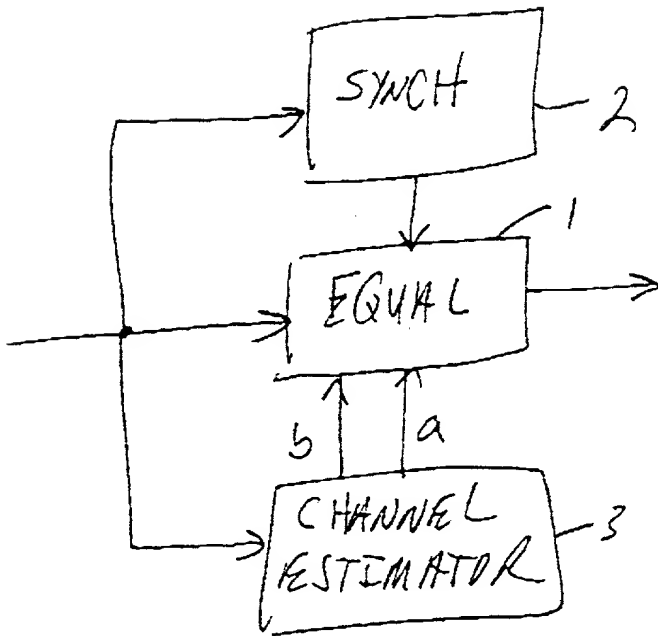


FIGURE 1

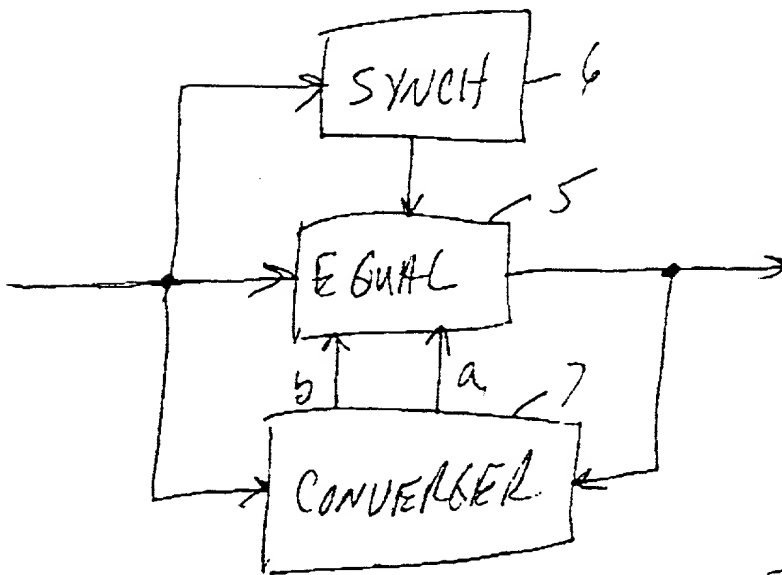


FIGURE 2

0054557.040700

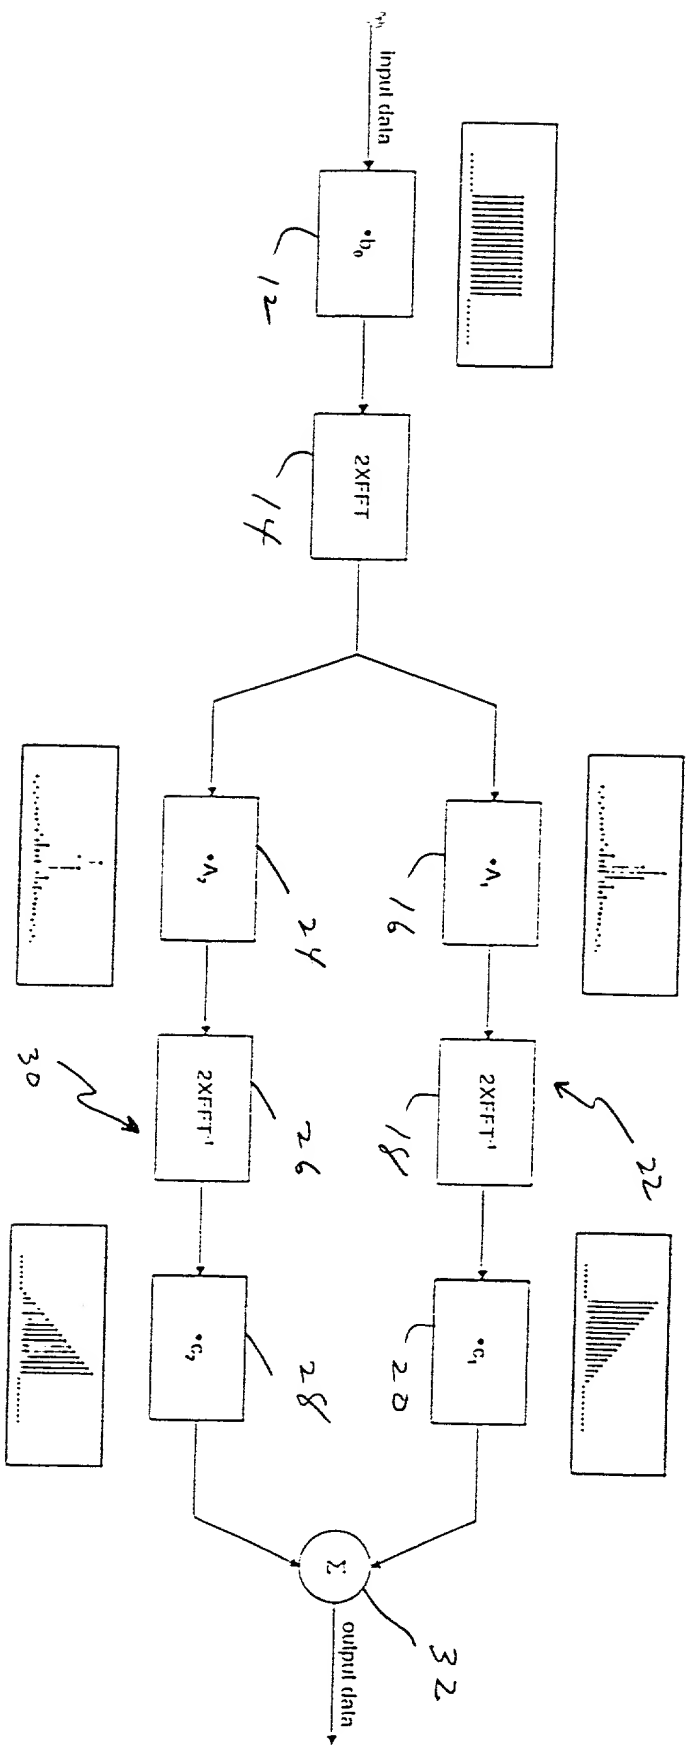



Fig. 3

D=1/16  
G=1  
10.97 dB

[illegible]



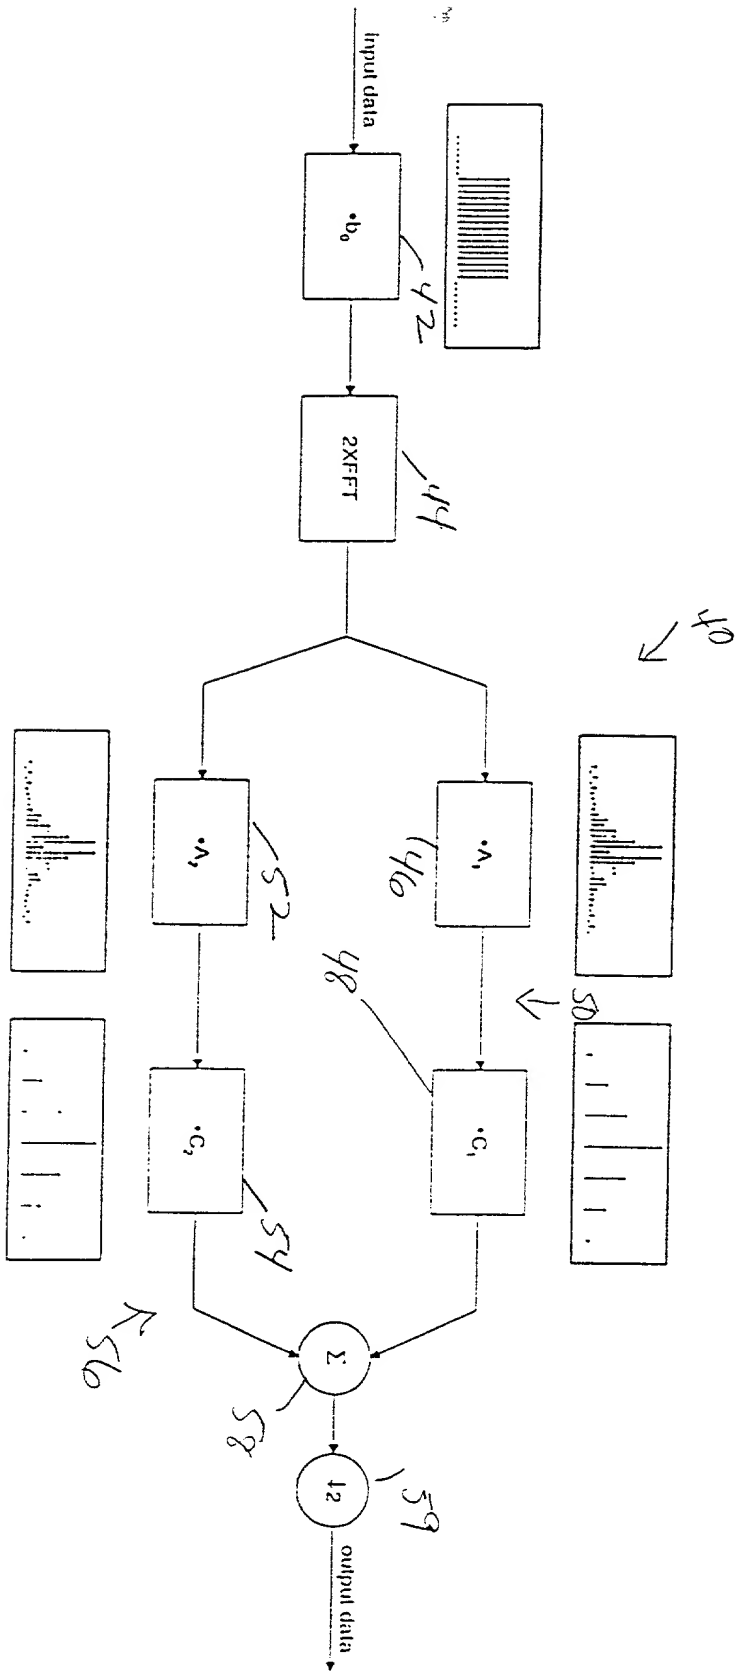


Fig. 5

DELAY=1/16, GAIN=1, TARGET THRESHOLD=15 DB

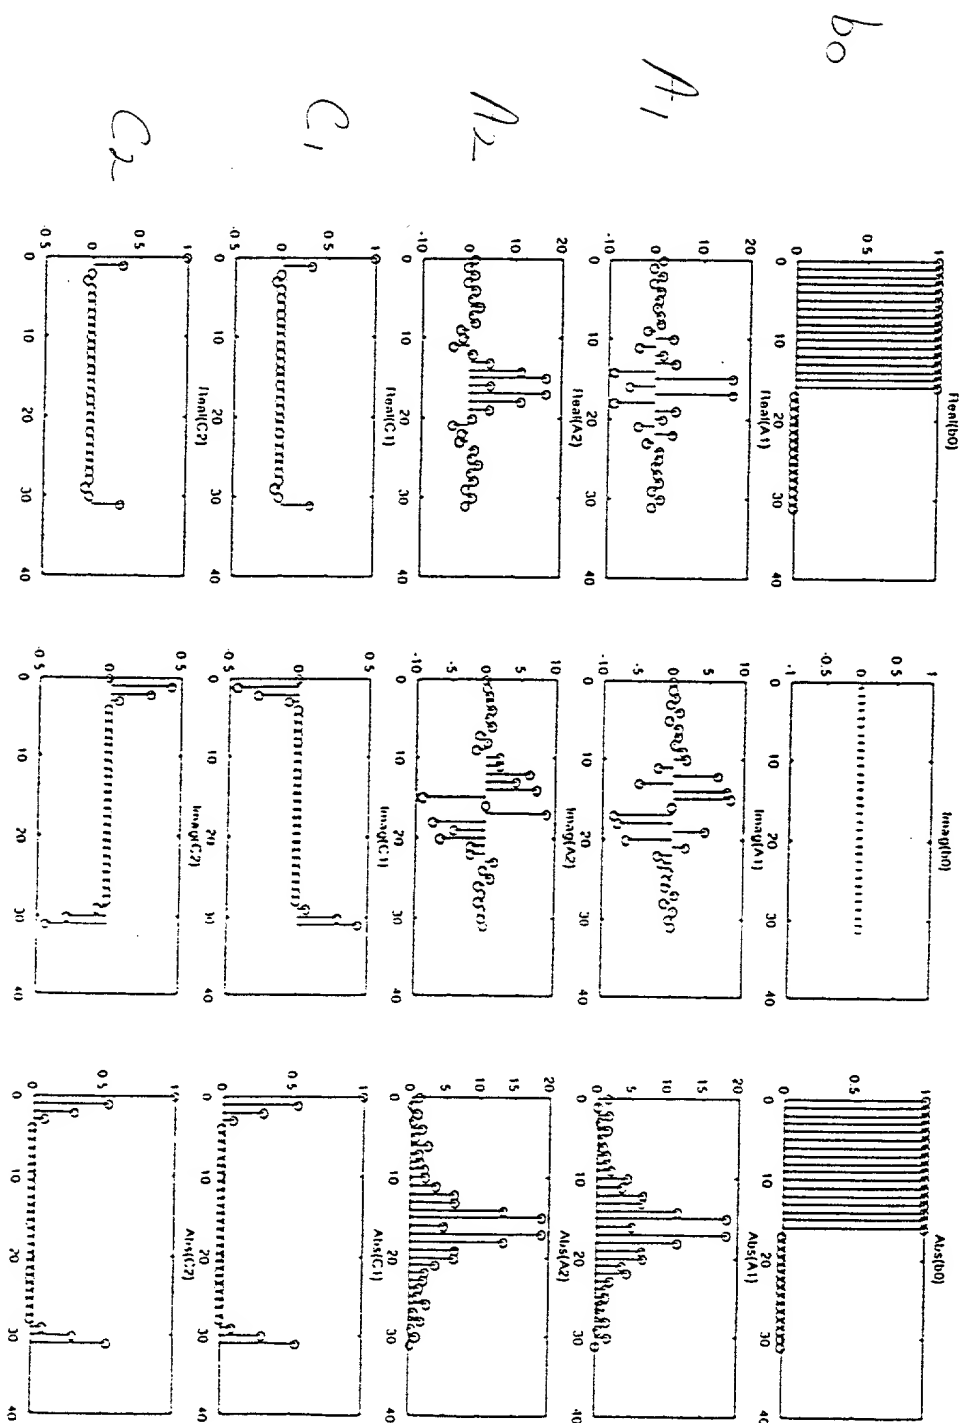


Fig. 6

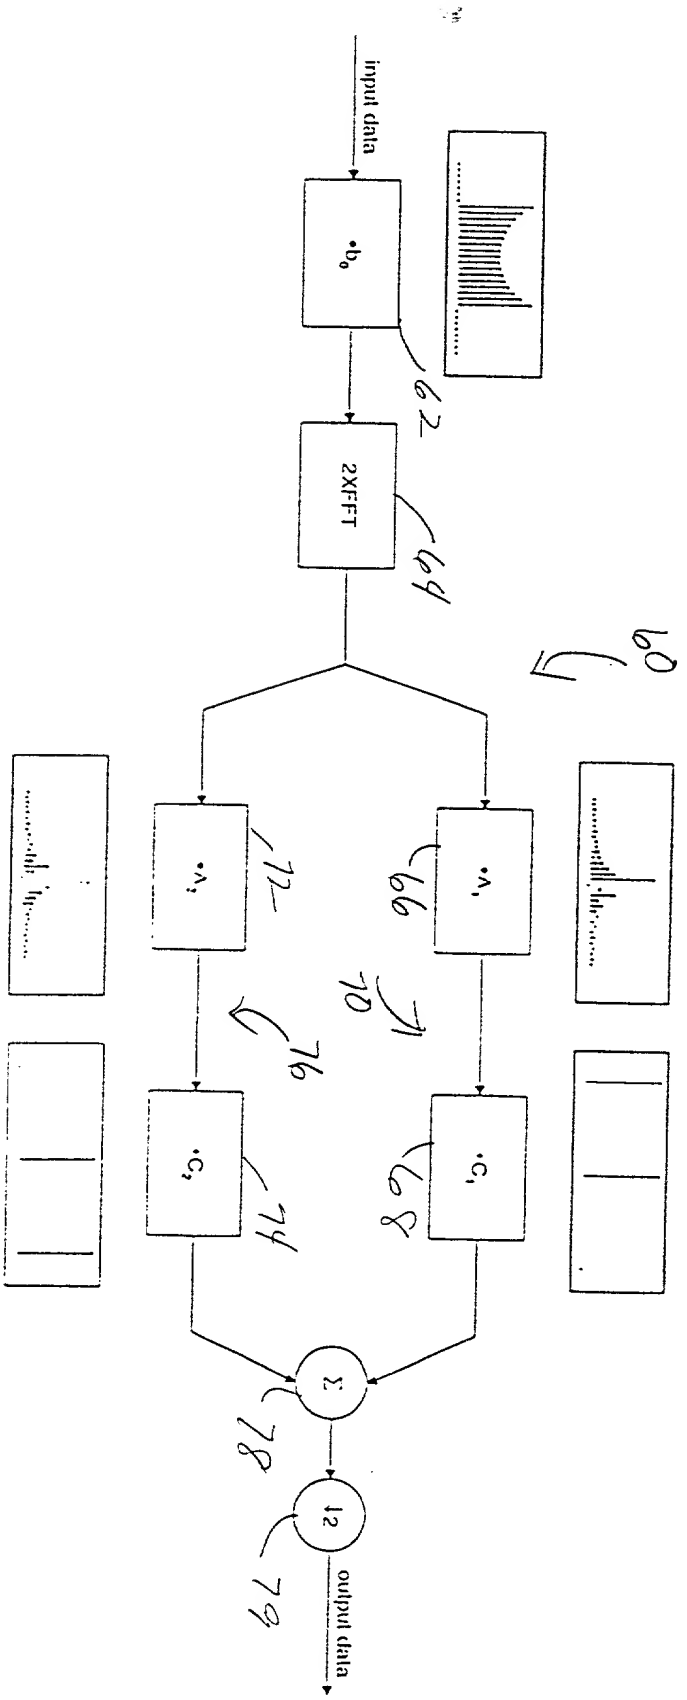


Fig. 7

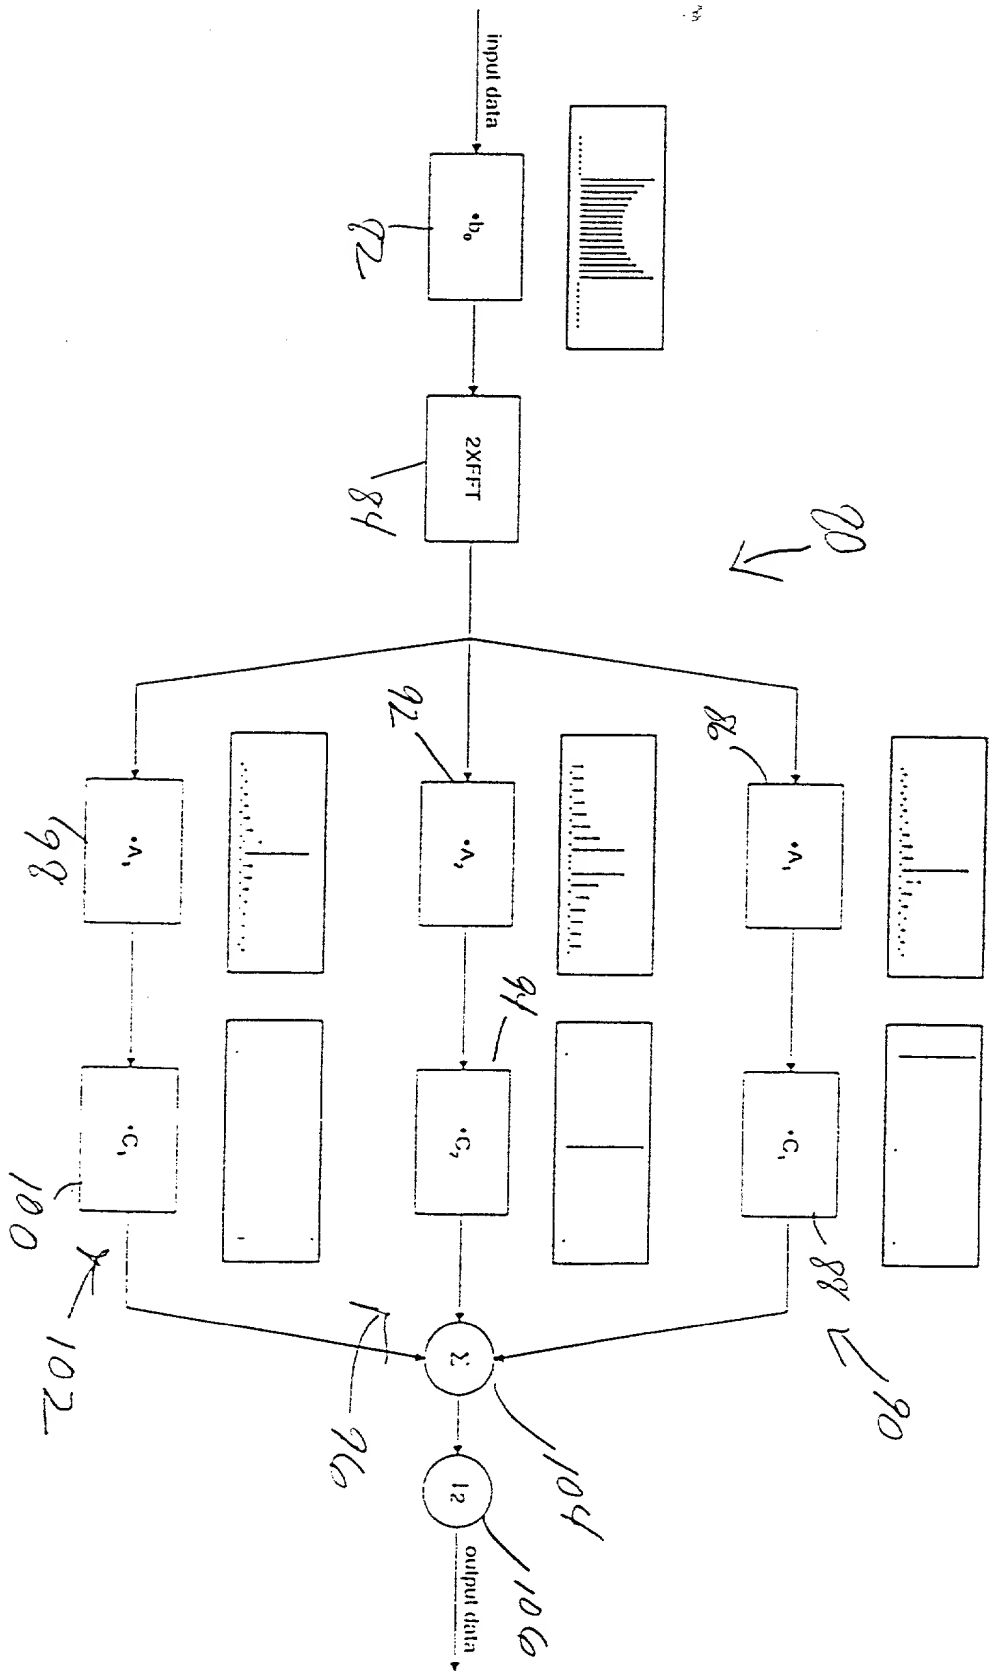


Fig. 8

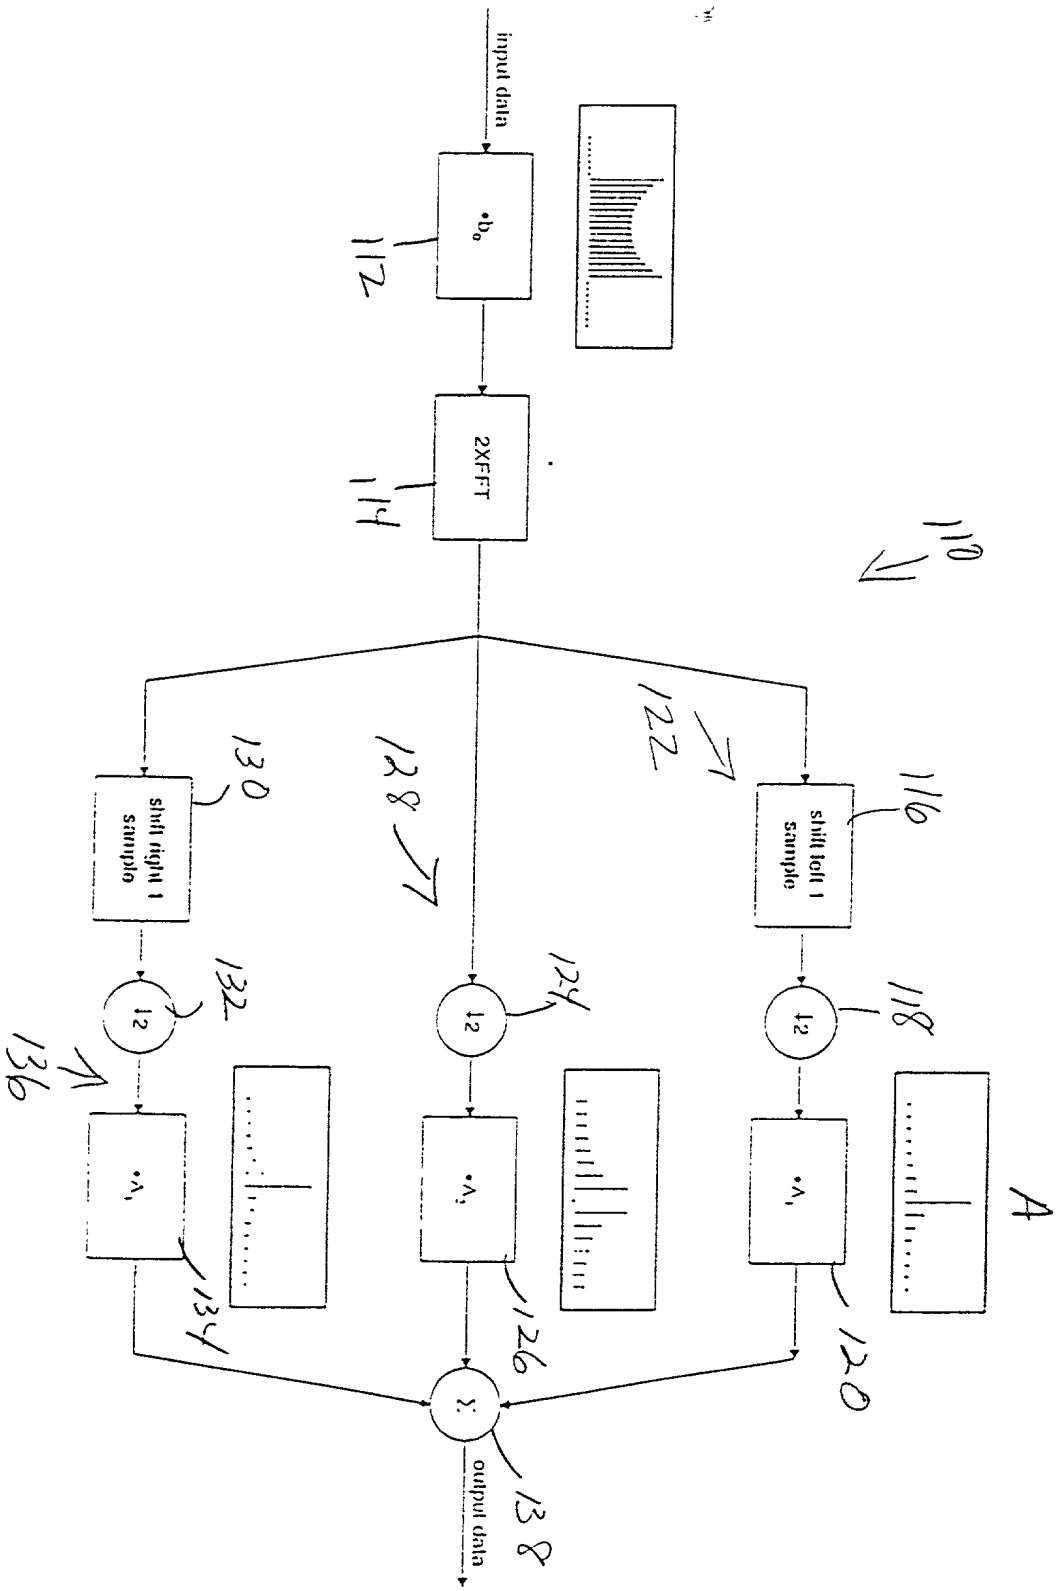


Fig. 9




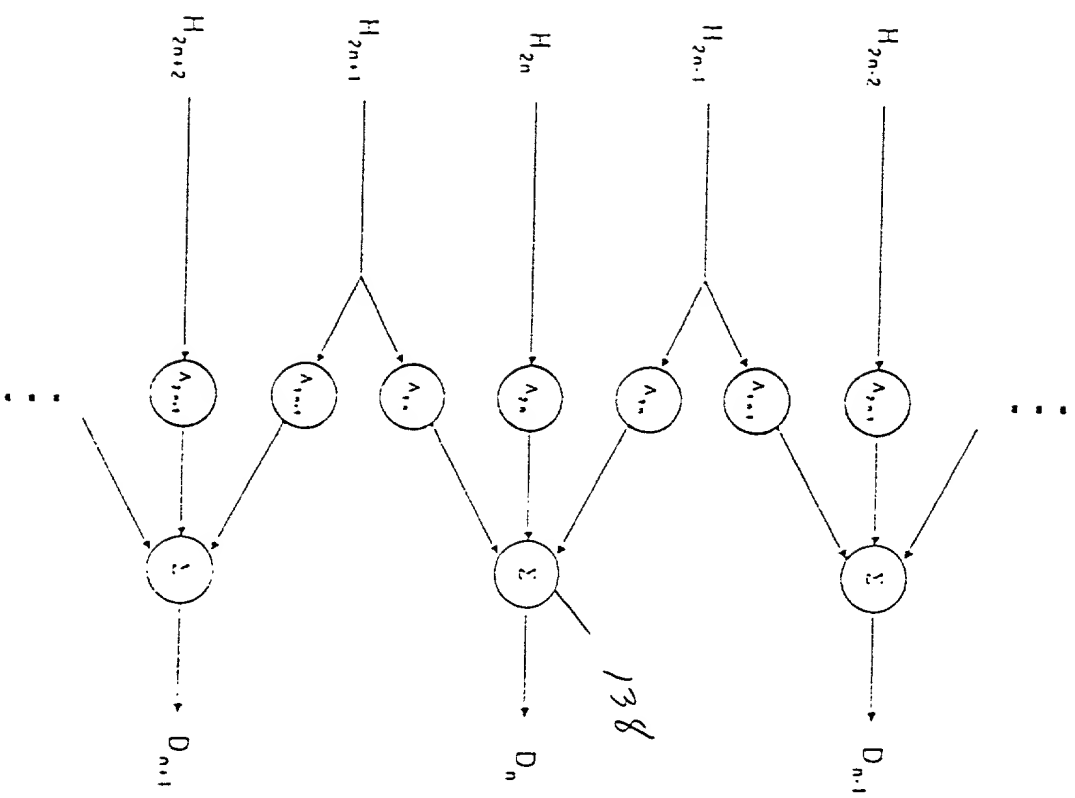


Fig. 10




Variable	Mean	SD	Min	Max
Age	25.1	4.2	18	35
Gender	0.5	0.5	0	1
Marital status	0.1	0.3	0	1
Education	12.5	1.5	10	16
Income	1.2	0.8	0.5	2.5
Health status	0.5	0.5	0	1
Employment	0.4	0.5	0	1
Family size	3.2	1.2	1	6
Urban/rural	0.6	0.5	0	1
Religion	0.3	0.5	0	1
Political party	0.2	0.4	0	1
Language	0.1	0.3	0	1
Ethnicity	0.1	0.3	0	1
Marital status	0.1	0.3	0	1
Education	12.5	1.5	10	16
Income	1.2	0.8	0.5	2.5
Health status	0.5	0.5	0	1
Employment	0.4	0.5	0	1
Family size	3.2	1.2	1	6
Urban/rural	0.6	0.5	0	1
Religion	0.3	0.5	0	1
Political party	0.2	0.4	0	1
Language	0.1	0.3	0	1
Ethnicity	0.1	0.3	0	1
Marital status	0.1	0.3	0	1
Education	12.5	1.5	10	16
Income	1.2	0.8	0.5	2.5
Health status	0.5	0.5	0	1
Employment	0.4	0.5	0	1
Family size	3.2	1.2	1	6
Urban/rural	0.6	0.5	0	1
Religion	0.3	0.5	0	1
Political party	0.2	0.4	0	1
Language	0.1	0.3	0	1
Ethnicity	0.1	0.3	0	1
Marital status	0.1	0.3	0	1
Education	12.5	1.5	10	16
Income	1.2	0.8	0.5	2.5
Health status	0.5	0.5	0	1
Employment	0.4	0.5	0	1
Family size	3.2	1.2	1	6
Urban/rural	0.6	0.5	0	1
Religion	0.3	0.5	0	1
Political party	0.2	0.4	0	1
Language	0.1	0.3	0	1
Ethnicity	0.1	0.3	0	1
Marital status	0.1	0.3	0	1
Education	12.5	1.5	10	16
Income	1.2	0.8	0.5	2.5
Health status	0.5	0.5	0	1
Employment	0.4	0.5	0	1
Family size	3.2	1.2	1	6
Urban/rural	0.6	0.5	0	1
Religion	0.3	0.5	0	1
Political party	0.2	0.4	0	1
Language	0.1	0.3	0	1
Ethnicity	0.1	0.3	0	1
Marital status	0.1	0.3	0	1
Education	12.5	1.5	10	16
Income	1.2	0.8	0.5	2.5
Health status	0.5	0.5	0	1
Employment	0.4	0.5	0	1
Family size	3.2	1.2	1	6
Urban/rural	0.6	0.5	0	1
Religion	0.3	0.5	0	1
Political party	0.2	0.4	0	1
Language	0.1	0.3	0	1
Ethnicity	0.1	0.3	0	1
Marital status	0.1	0.3	0	1
Education	12.5	1.5	10	16
Income	1.2	0.8	0.5	2.5
Health status	0.5	0.5	0	1
Employment	0.4	0.5	0	1
Family size	3.2	1.2	1	6
Urban/rural	0.6	0.5	0	1
Religion	0.3	0.5	0	1
Political party	0.2	0.4	0	1
Language	0.1	0.3	0	1
Ethnicity	0.1	0.3	0	1
Marital status	0.1	0.3	0	1
Education	12.5	1.5	10	16
Income	1.2	0.8	0.5	2.5
Health status	0.5	0.5	0	1
Employment	0.4	0.5	0	1
Family size	3.2	1.2	1	

DELAY=1/16, GAIN=1, TARGET THRESHOLD=15 DB




$b_0$   
D=1/16  
G=1  
10.91 dB

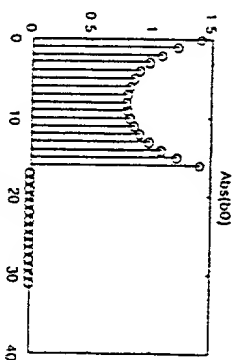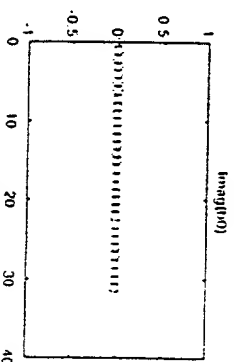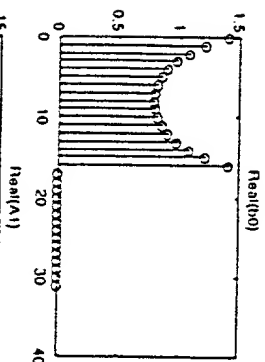

$A_1$

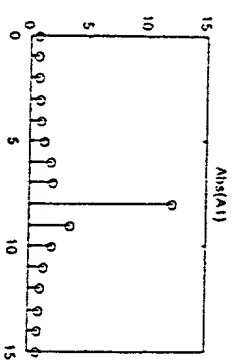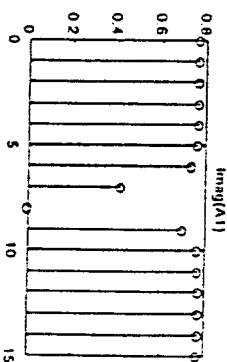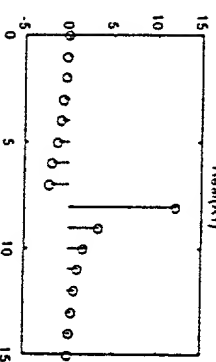

$A_2$

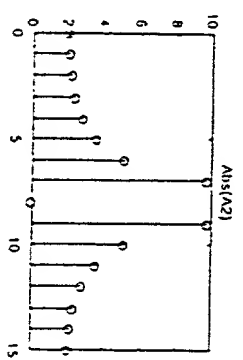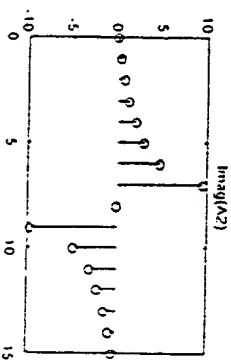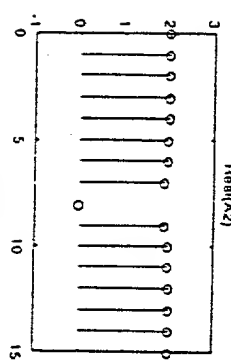

$A_3$




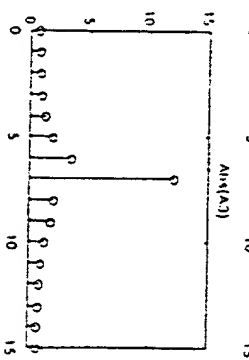



Fig. 11


054455Z 040700

FIGURE 12

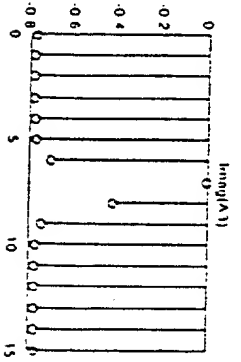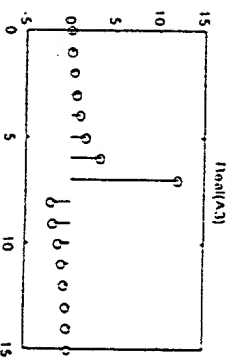

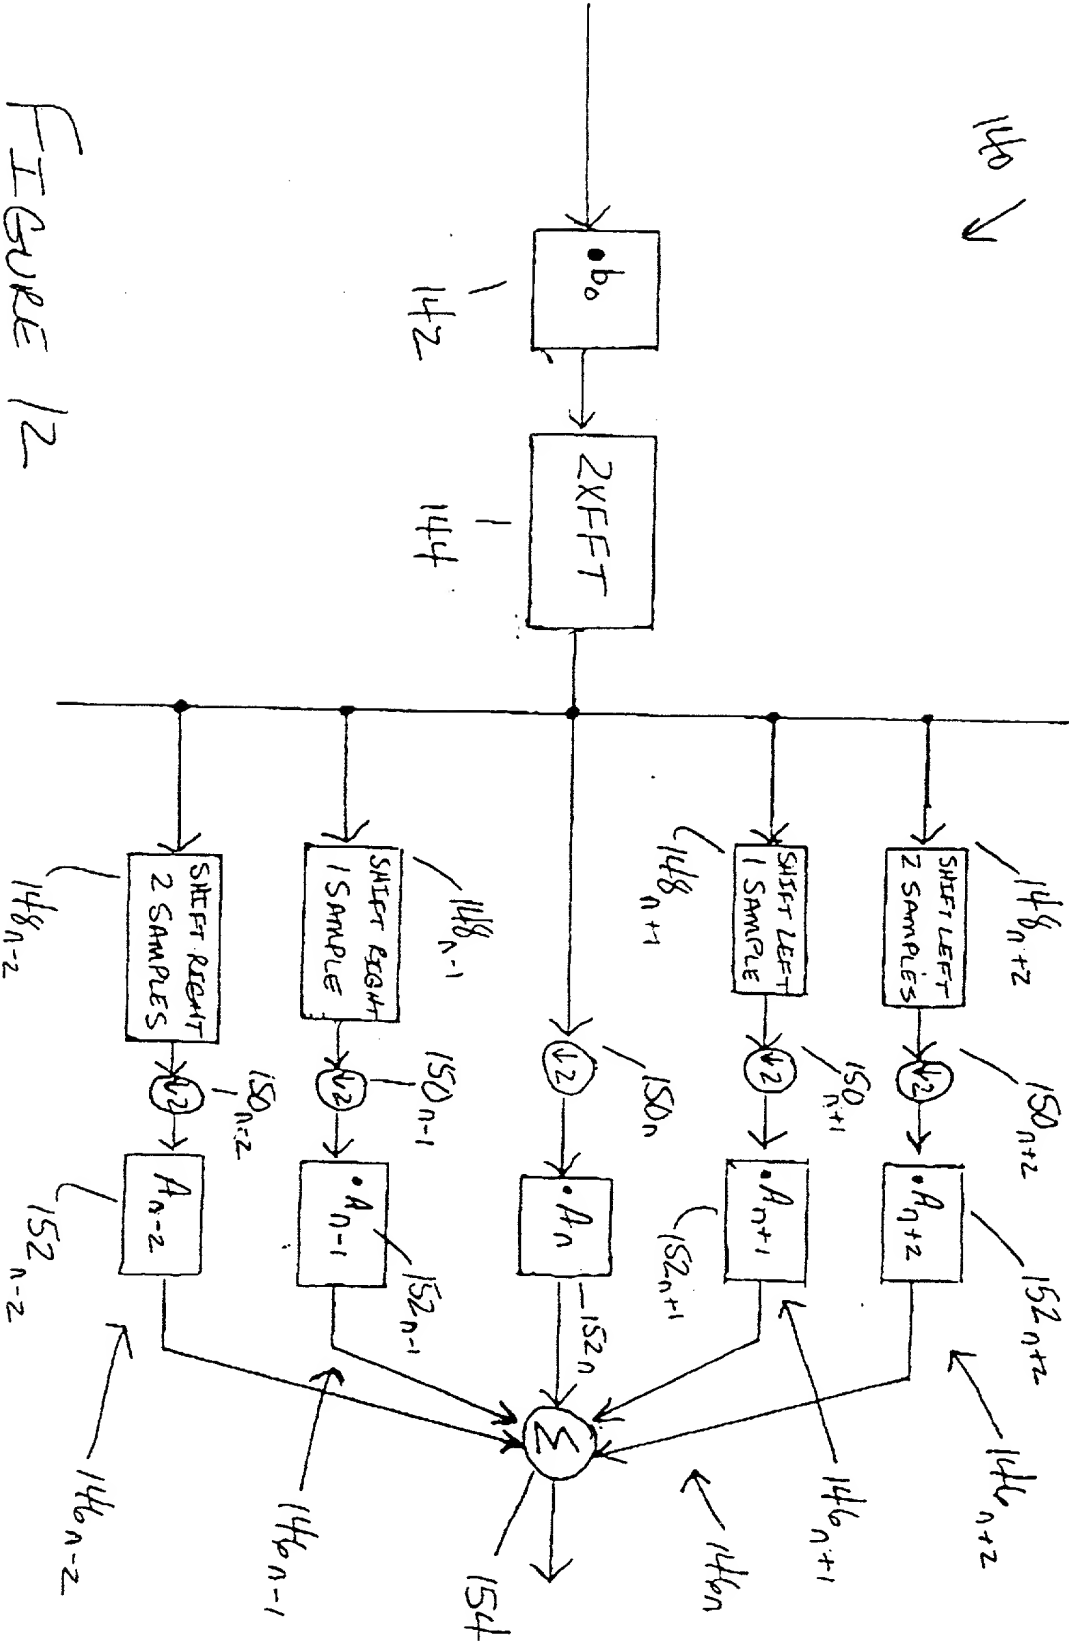

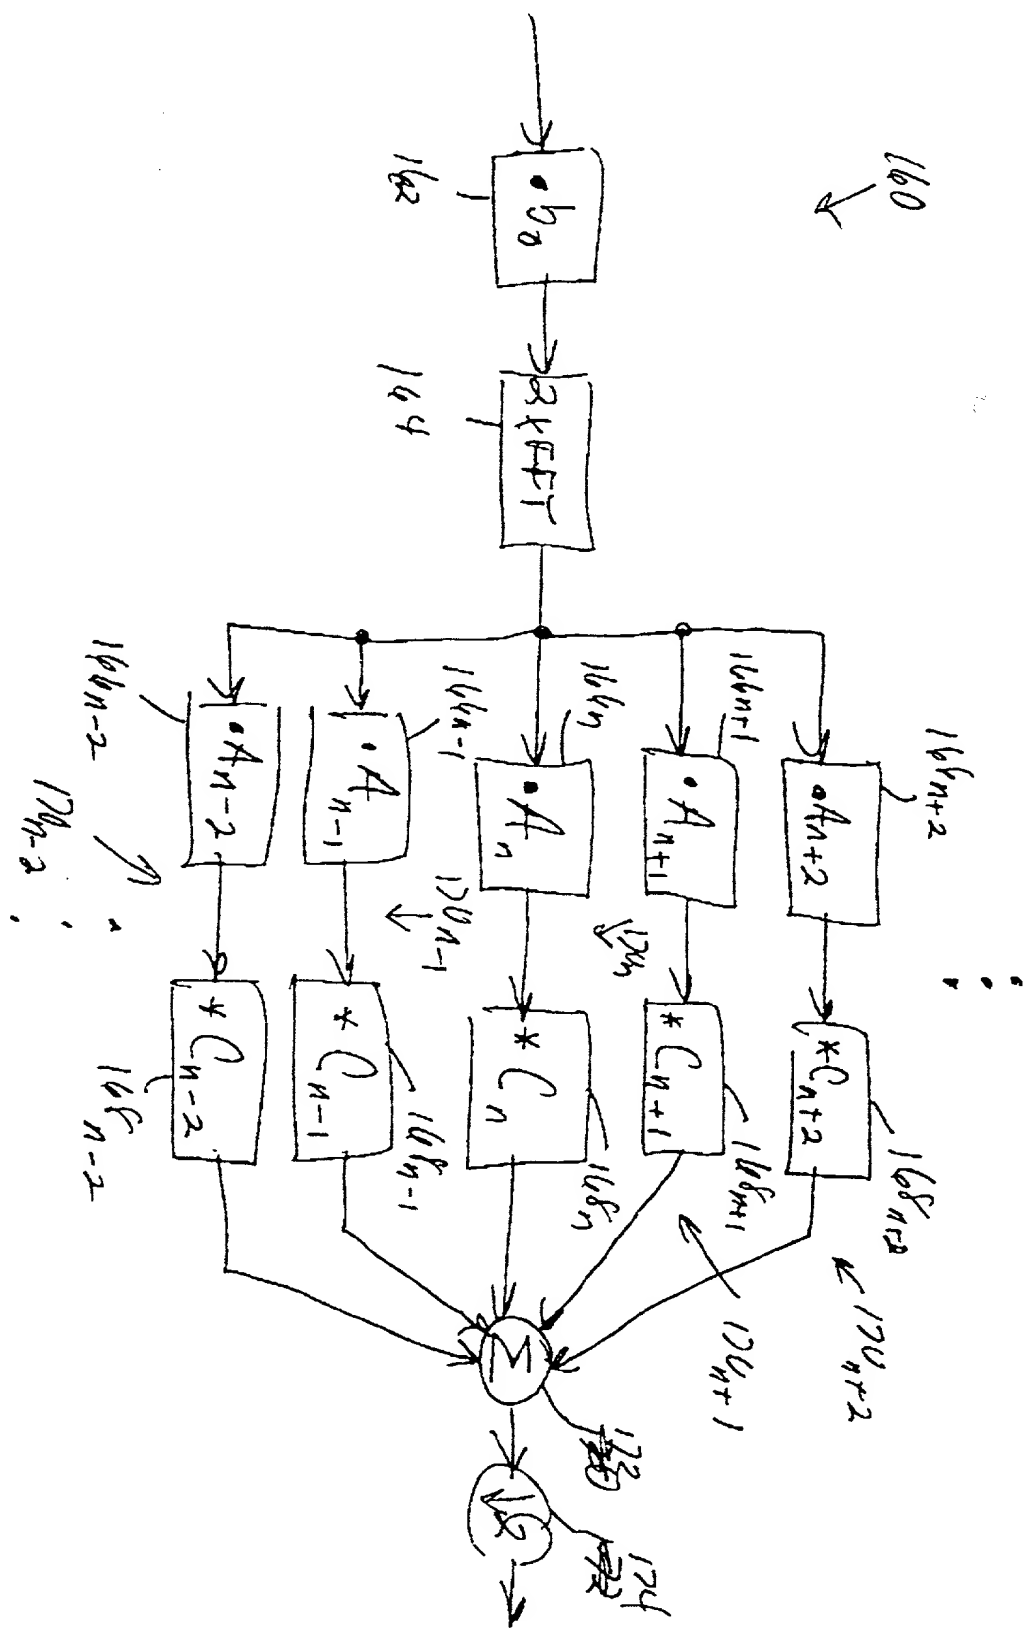


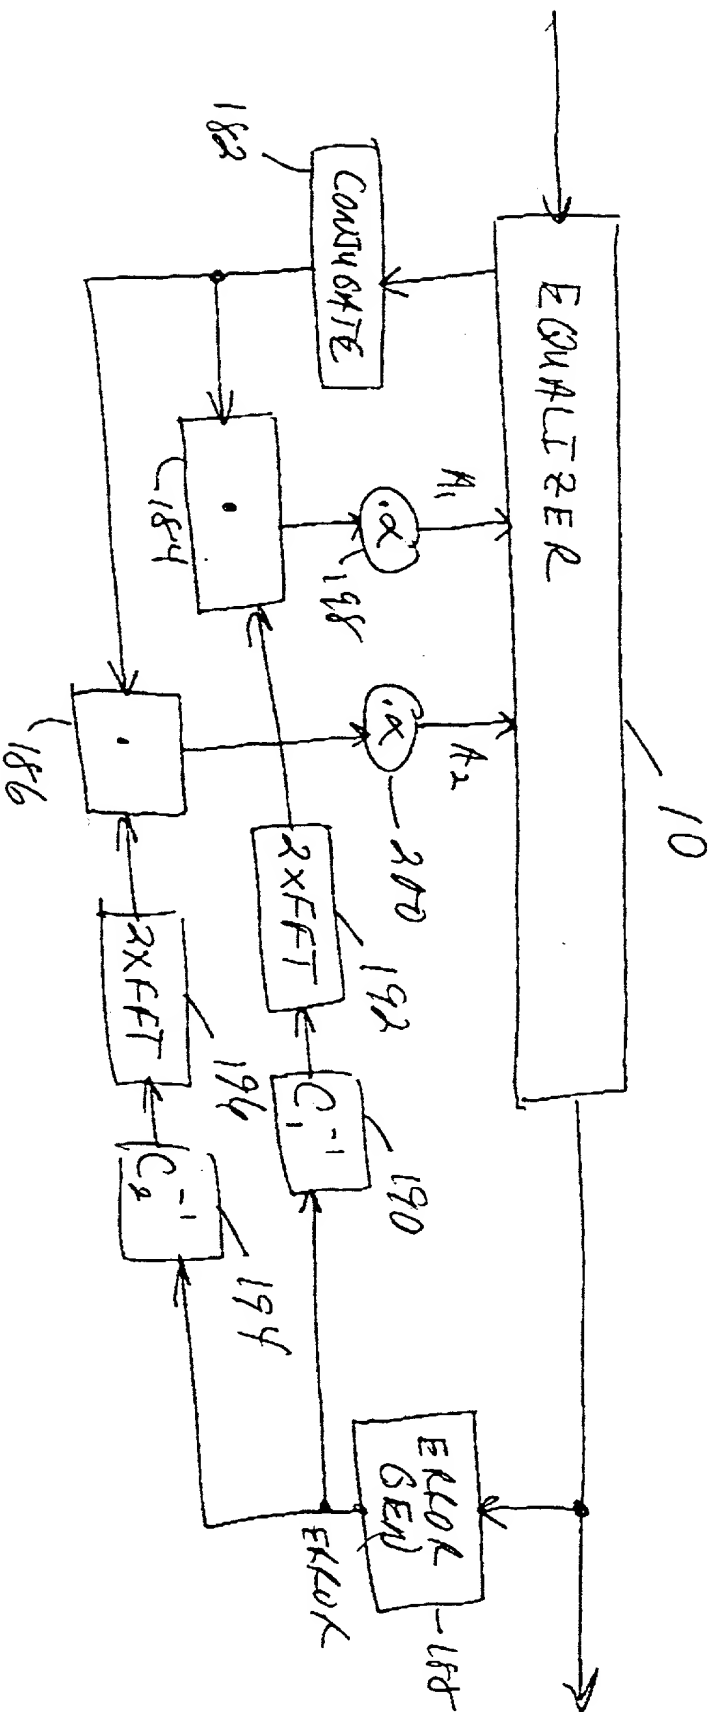


180 →

FIGURE 14

09545597.040700

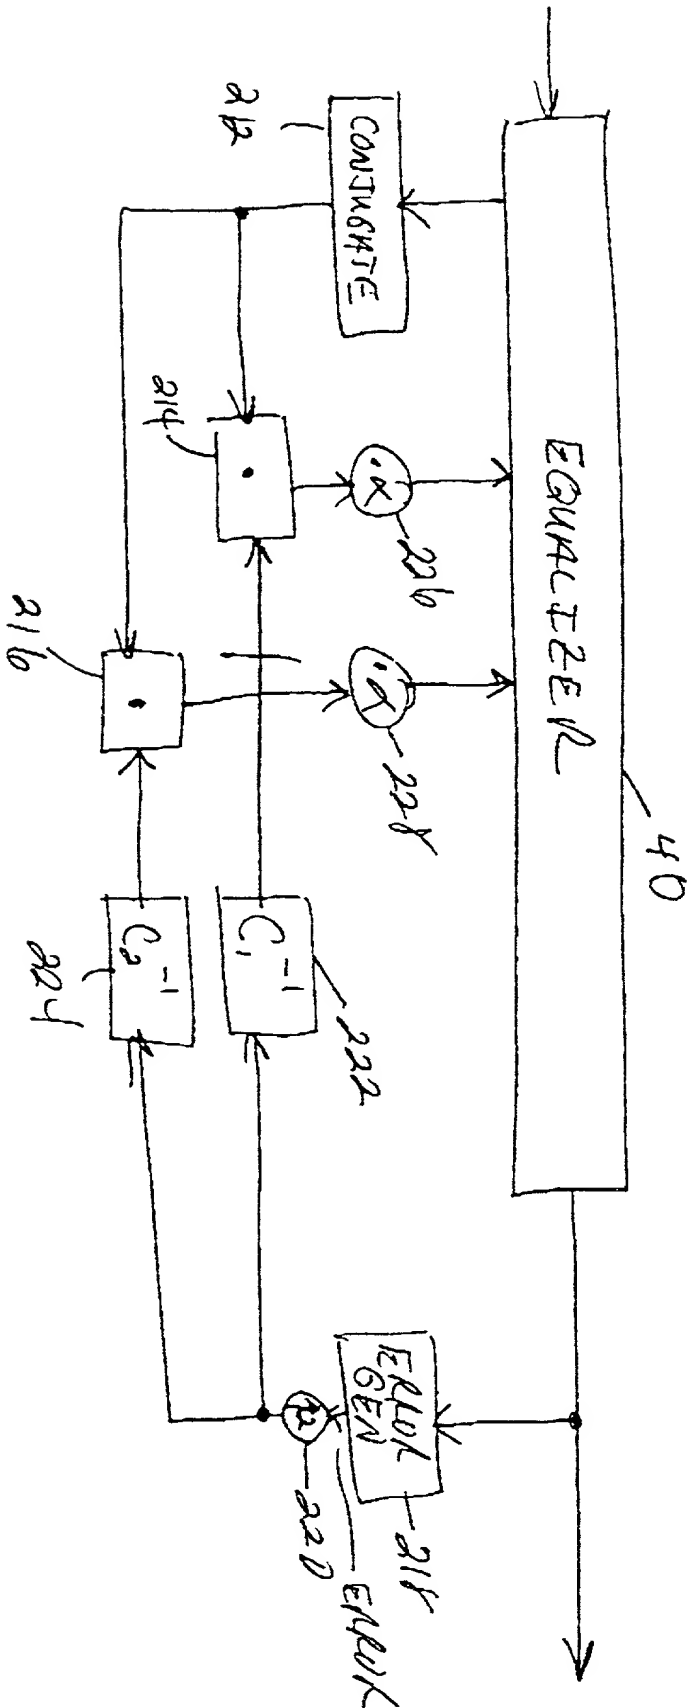


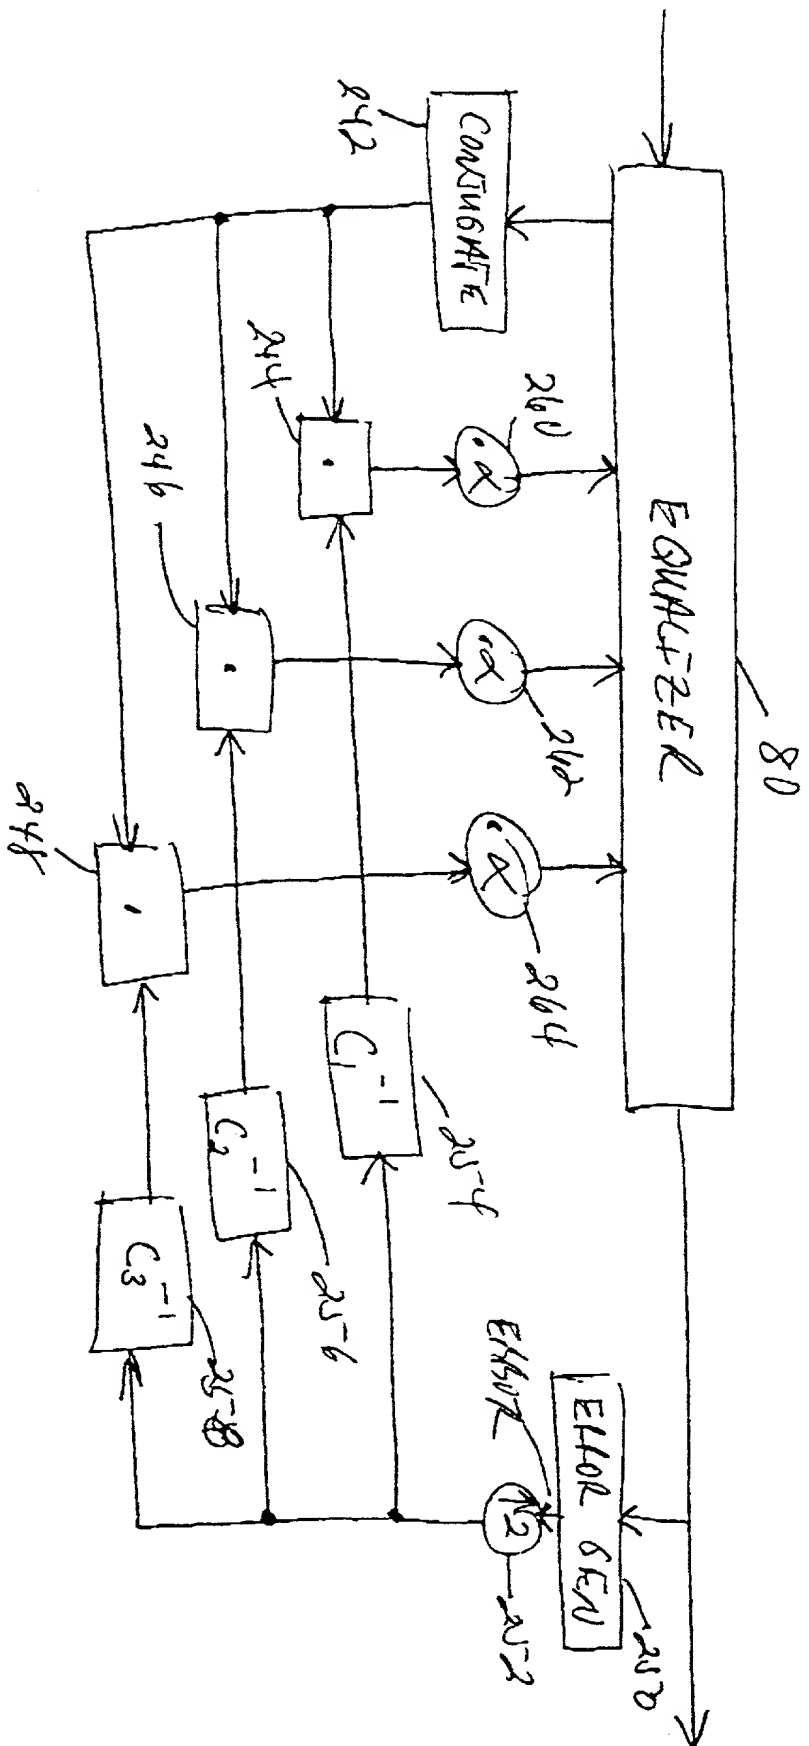

240 →

FIGURE 16

09545597-040700



FTS 17

Figure 1: Schematic representation of the experimental design. The diagram shows a sequence of events: a subject enters a room, a door is closed, and a light is turned on. The subject then performs a task, and the door is opened. The subject then exits the room. The diagram is labeled 'Figure 1' and 'Schematic representation of the experimental design'.

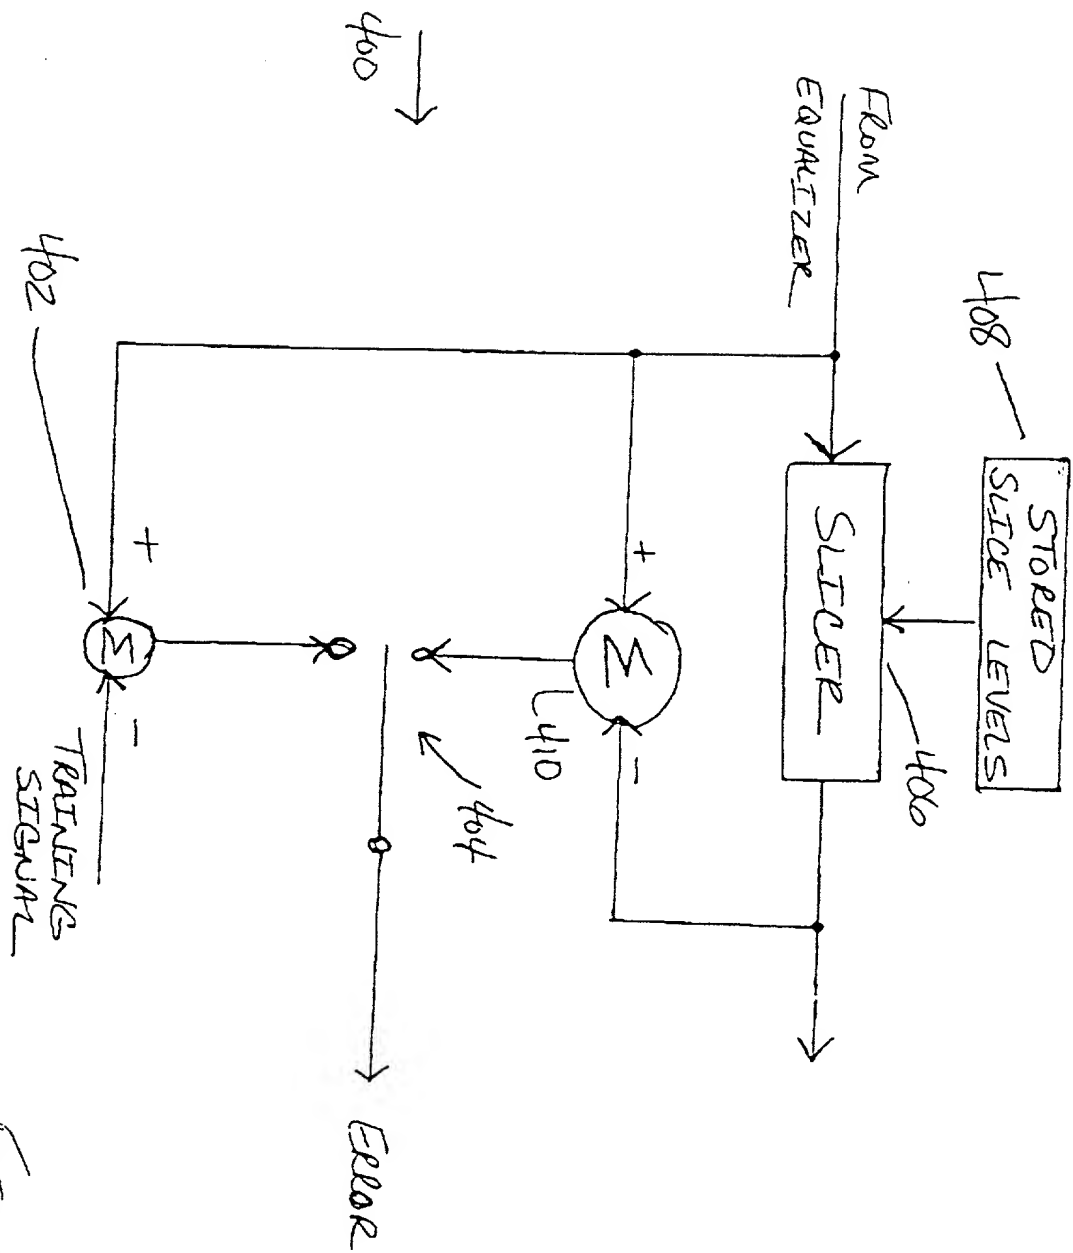


FIGURE  
18

09545597 .040700

## DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name; I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **"Multipath Ghost Eliminating Equalizer With Optimum Noise Enhancement,"** the specification of which (check one): ☒ is attached hereto; ☐ was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable) \_\_\_\_\_ was filed as PCT International Application No. \_\_\_\_\_ on \_\_\_\_\_ and was amended under Article 19 on \_\_\_\_\_ (if applicable). I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I acknowledge the duty to disclose to the Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

Priority Claimed

(Application Serial Number) (Country) (Day/Month/Year Filed)

☐ Yes ☐ No

(Application Serial Number) (Country) (Day/Month/Year Filed)

☐ Yes ☐ No

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below:

(Application Serial Number) (Day/Month/Year Filed)

(Application Serial Number) (Day/Month/Year Filed)

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s) or PCT international application(s) designating the United States of America listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior application(s) in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in 37 U.S.C. §1.56 which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

(Application Serial Number) (Day/Month/Year Filed) (Status - Patented, Pending or Abandoned)

(Application Serial Number) (Day/Month/Year Filed) (Status - Patented, Pending or Abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. §1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: I hereby appoint as my attorneys, with full powers of substitution and revocation, to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Jack Kail

Registration No. 27,566

## SEND CORRESPONDENCE TO:

FIRM NAME

PHONE NO.

STREET

CITY &amp; STATE

ZIP CODE

Jack Kail  
Zenith Electronics Corporation

847-391-8011

1000 Milwaukee Avenue

Glenview, IL

60025

Full Name of First or Sole Inventor <b>Richard W. Citta</b>	Citizenship <b>USA</b>
Residence Address - Street <b>739 N. Columbian</b>	Post Office Address - Street <b>739 N. Columbian</b>
City (Zip) <b>Oak Park, 60302</b>	City (Zip) <b>Oak Park, 60302</b>
State or Country <b>Illinois</b>	State or Country <b>Illinois</b>
Date <b>4-6-00</b>	Signature <i>Richard W. Citta</i>
Full Name of Second Inventor <b>Scott M. LoPresto</b>	Citizenship <b>USA</b>
Residence Address - Street <b>2361 S. Lexington Dr. - Apt. 206</b>	Post Office Address - Street <b>2361 S. Lexington Dr. - Apt. 206</b>
City (Zip) <b>Mt. Prospect, 60056</b>	City (Zip) <b>Mt. Prospect, 60056</b>
State or Country <b>Illinois</b>	State or Country <b>Illinois</b>
Date <b>4/6/2000</b>	Signature <i>Scott M. LoPresto</i>
Full Name of Third Inventor <b>Jingsong Xia</b>	Citizenship <b>China</b>
Residence Address - Street <b>1044 Evergreen Street</b>	Post Office Address - Street <b>1044 Evergreen Street</b>
City (Zip) <b>Mundelein 60060</b>	City (Zip) <b>Mundelein 60060</b>
State or Country <b>Illinois</b>	State or Country <b>Illinois</b>
Date <b>04/06/2000</b>	Signature <i>Jingsong Xia</i>